


LIGHT LINEAR PT-X 16 (LI-21344)



Product description


2 sides - Supplied with specific square, straight aluminium pole - Height options: 6 - 10 m

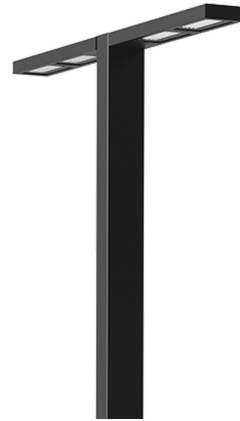


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Maximum wind load resistance is 260 km/h for pole high 6 m, 210 km/h for pole high 7 m, 170 km/h for pole high 8 m, 140 km/h for pole high 9 m
- Surge protection 10kV


Optic

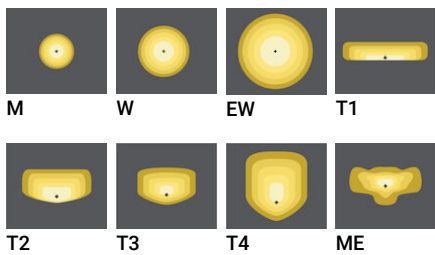

Product colour

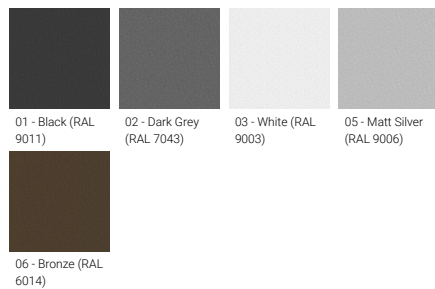

Special finishes upon request

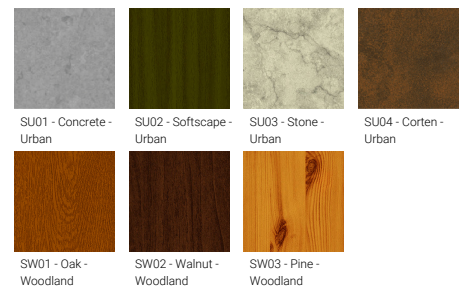


LIGHT LINEAR PT-X 16 (LI-21344)

Technical information

Material	Aluminium
Light source	2 x 96 LED
Power	544 W
Lumen	30356 - 38640 lm
Efficacy	112 - 142 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	M, W, EW, T1, T2, T3, T4, ME 36°, 57°, 115°, 130°x38°, 140°x39°, 148°x76°, 116°x86°, 146°x67°
Optic value	
CCT / CRI	2700K CRI70, 3000K CRI70, 4000K CRI70
Bug	B3-U0-G3, B4-U0-G3, B4-U0-G4, B5-U0-G1, B5-U0-G2, B5-U0-G5
ULR	<1%
ULOR	<1%
CIE flux code n°3	96, 97, 98, 99
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2x26.0 kg
Operating temperature	-20 °C to 50 °C
EPA (m2)	0.348
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High- efficiency polycarbonate lens

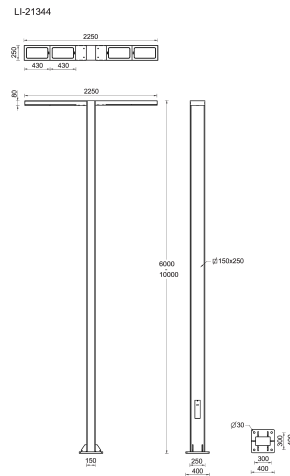

LIGHT LINEAR PT-X 16 (LI-21344)**Accessory**

Circuit breaker box IP44
A21291



Root mount kit
A22391



DALI Control System
Control-DALI

Pole (required)

6 m - Square, straight galvanised
steel pole for LIGHT LINEAR PT-
X - 2 sides
SPC260150-PT-X



7 m - Square, straight galvanised
steel pole for LIGHT LINEAR PT-
X - 2 sides
SPC270150-PT-X



8 m - Square, straight galvanised
steel pole for LIGHT LINEAR PT-
X - 2 sides
SPC280150-PT-X



9 m - Square, straight galvanised
steel pole for LIGHT LINEAR PT-
X - 2 sides
SPC290150-PT-X



10 m - Square, straight
galvanised steel pole for LIGHT
LINEAR PT-X - 2 sides
SPC2100150-PT-X