


EURASIA 1 (EU-30216-2)



Product description

Flat top with shade

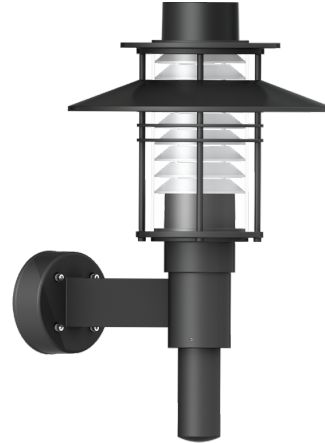

microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear UV-stabilised polycarbonate diffuser
- Integral control gear

Optic




G

Product colour

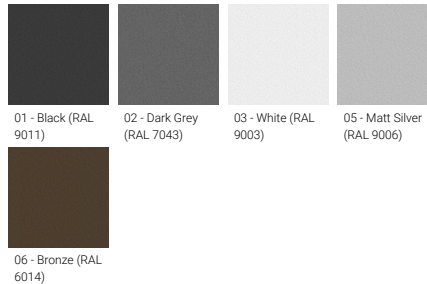

Special finishes upon request

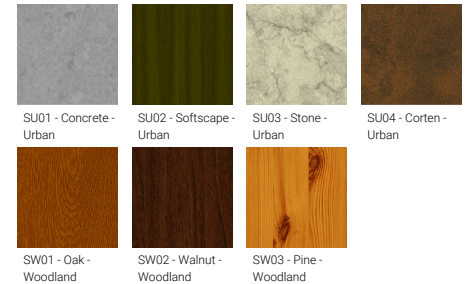

EURASIA 1 (EU-30216-2)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	176°		
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80		
Lumen	979 - 991 lm	Bug	B1-U3-G1		
Efficacy	24 lm/W	ULR	20%		
Driver option	Integral control gear	ULOR	20%	Weight	13.0 kg
Driver	Constant current (CC)	CIE flux code n°3	78	Operating temperature	-20 °C to 40 °C
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off	Through wiring	Two cable entries for through wiring
				Lens / Reflector / Optic	Clear UV-stabilised polycarbonate diffuser
				MacAdam Ellipse	3 SDCM
				Lifetime L90B10 (hours)	> 55,000

EU-30216-2

