

LIGHTALK 11 (LA-60026) (Version 1)



Product description

Without remote driver - With recessing box - Constant voltage (CV) 24 V - 1250 mm - Class III



Luminaire Structure

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> - Die-cast aluminium end-caps - Extruded aluminium housing - Pre-treated before powder coating ensuring high corrosion resistance - Stainless steel frame on request - Two cable entries for through wiring | <ul style="list-style-type: none"> - Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable - Stainless steel fasteners in grade 316 - Durable silicone rubber gasket - Clear toughened glass - Remote driver (not included) | <ul style="list-style-type: none"> - Recessing box is included - Suitable for walk-over with a maximum load of 500 kg - 24 VDC input, DMX/RDM address with stable signal |
|---|--|---|

Optic



AS

Product colour




00 - Stainless Steel

LIGHTALK 11 (LA-60026) (Version 1)

Technical information

Material	Stainless Steel	Input voltage	24 VDC	Product colours	Stainless Steel
Light source	36 LED	Optic	AS	Weight	7.1 kg
Power	51 W	Optic value	27°x60°	Operating temperature	-20 °C to 40 °C
Lumen	4483 - 4719 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Efficacy	88 - 93 lm/W	ULR	100%	Through wiring	Two cable entries for through wiring
Driver option	Remote driver (not included)	ULOR	100%	Lens / Reflector / Optic	Clear toughened glass
Driver	Constant voltage (CV)	Dimming type	On/Off		

LA-60026

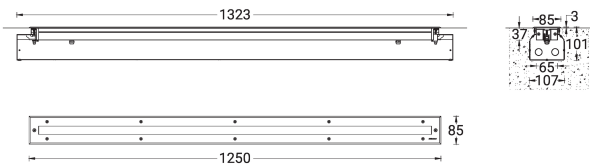


LIGHTALK 11 (LA-60026) (Version 1)

Accessory



Cable - Connector IP67 Female 2
Pin Power - 1000 mm
A65491-001



Cable - Connector IP67 Female 2
Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female +
Male 2 Pin Power - 1000 mm
A65591-001



Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND