

LADOR 41 (LD-20081)



Product description

Supplied with specific 8 m square, straight galvanised steel pole: SPC180125-LD - RGBW




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry, through wiring upon request
- One cable gland supplied with 2 m of 5x1.5 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV


Optic

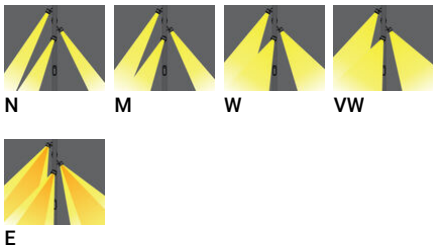

Product colour

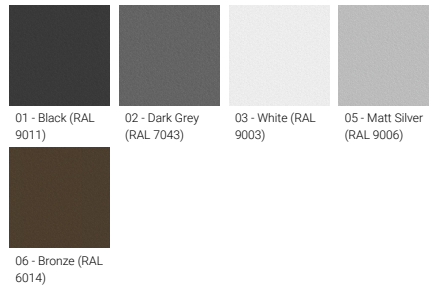

Special finishes upon request

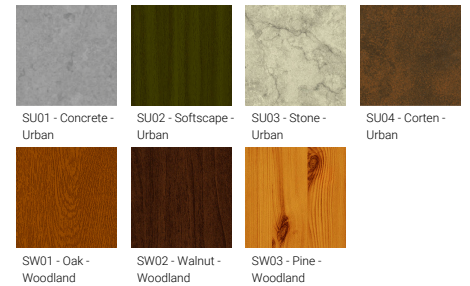

LADOR 41 (LD-20081)**Accessory**


DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Linear spread lens
A51414



Honeycomb louvre
A52121



Anti-glare visor
A53131

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)

8 m - Square, straight galvanised
steel pole for LADOR
SPC180125-LD