

PIAZZA (PI-80001)**Luminaire Structure**

- Single cable entry
- Integral control gear
- Opal UV-stabilised polycarbonate diffuser

Optic

**G****Product colour**



08 - Glossy White (RAL 9010) 09 - Glossy Black (HB451022M)

PIAZZA (PI-80001)

Technical information


Material	Aluminium
Light source	50 LED
Power	22 W
Lumen	2039 - 2111 lm
Efficacy	93 - 96 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	118°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI, Trailing edge
Product colours	Glossy White, Glossy Black
Weight	2.2 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 23,000
Lifetime L80B10 (hours)	> 45,000
Lifetime L80B50 (hours)	> 49,000

Variants (1-10V, DALI) Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

PI-80001

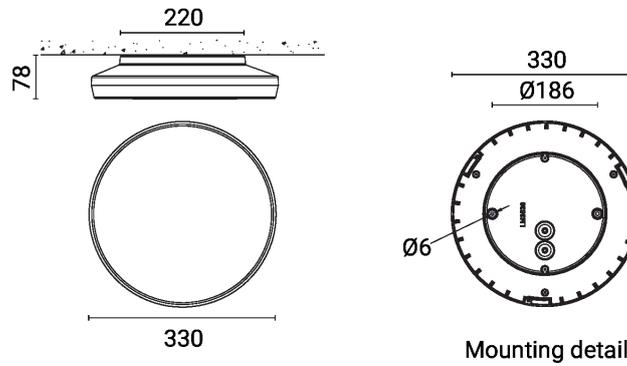

Accessory



DALI Control System
Control-DALI
