

VANCOUVER 51 (VA-20233)



Product description

240x240 mm - 4810 mm - Decorative pattern type 3
(Optic) - 3 projectors (Optic 2nd) IP65




microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Optic




G / M

G / W

G / VW

Product colour

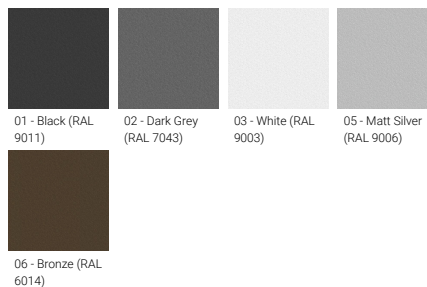

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

Special finishes upon request

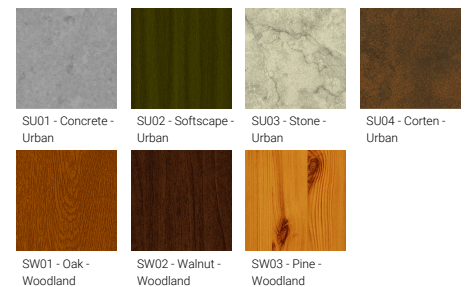

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland


SW02 - Walnut - Woodland

SW03 - Pine - Woodland

VANCOUVER 51 (VA-20233)

Technical information

Material	Aluminium	Optic value	134°	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Light source	1 COB & 2 x 1 COB (Projectors)	Optic (2nd)	M, W, VW	Through wiring	Single cable entry
Power	103 W	Optic (2nd) value	23°, 32°, 43°	Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
Lumen	7545 - 7845 lm	CCT / CRI	3000K CRI80, 4000K CRI80	MacAdam Ellipse	3 SDCM
Efficacy	73 - 76 lm/W	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 109,000
Driver option	Integral control gear	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 109,000
Driver	Constant current (CC)			Lifetime L80B50 (hours)	> 109,000
Input voltage	220-240 V 50/60 Hz			Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	G	Weight	60.8 kg		
		Operating temperature	-20 °C to 40 °C		
		EPA (m2)	1.154		

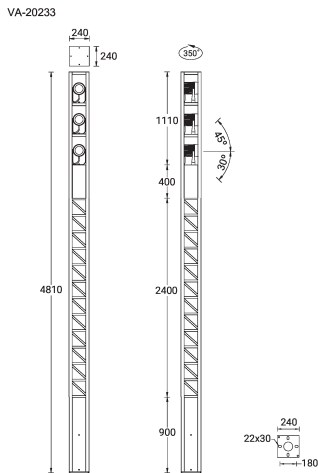

VANCOUVER 51 (VA-20233)

Accessory



Circuit breaker box IP44
A21291



Root mount kit
A21391



DALI Control System
Control-DALI