



VICTORIA 2 (VIC-80013)**Product description**

Optic arrangement type 2

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- One size: 600x600 mm
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Integral control gear
- Recessed and surface mounted options
- Accessories: Aluminium frame for surface installation & Aluminium frame for recessed installation of fitting into gypsum plasterboard

Optic**Product colour**

03 - White (RAL 9003)

VICTORIA 2 (VIC-80013)


Technical information


Material	Aluminium
Light source	48 LED
Power	19 W
Lumen	2700 lm
Efficacy	142 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	W, VW
Optic value	60°, 90°
CCT / CRI	3000K CRI90, 4000K CRI90
Bug	B2-U1-G0, B2-U1-G1
ULR	0%
ULOR	0%


CIE flux code n°3	99
Dimming type	On/Off, 1-10V, DALI
Product colours	White
Weight	2.0 kg
Operating temperature	-20 °C to 40 °C
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

VIC-80013

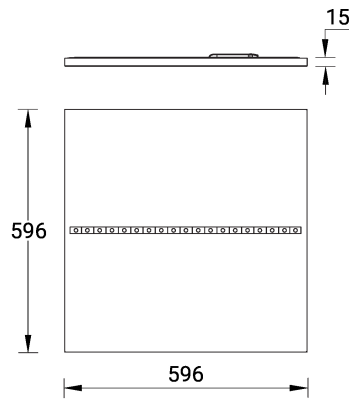

VICTORIA 2 (VIC-80013)**Accessory**

Frame for recessed installation
of fittings into gypsum
plasterboard ceiling SQUARE
(White)
A83081



Frame for surface installation
SQUARE (White)
A83281



Xpress wireless switch
A90591



Wireless bluetooth converter
A90291



DALI Control System
Control-DALI