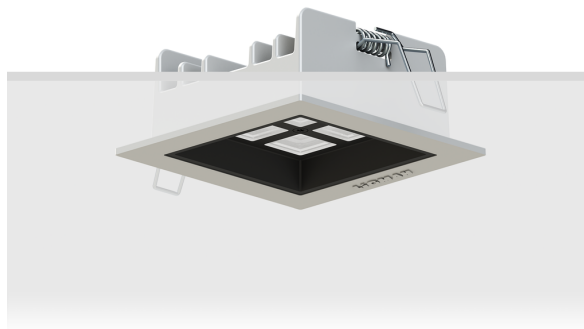



**BRIGHTON 3 (BRI-80001)****Luminaire Structure**

- Extruded aluminium housing with powder coating
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- High-efficiency PMMA lens
- Remote driver (included)
- Toolless flush-mount installation for 1-25 mm false ceilings
- Modular design for easy installation

**Optic**

M W EW

**Product colour**

08 - Glossy White (RAL 9010) 09 - Glossy Black (HB451022M)

**BRIGHTON 3 (BRI-80001)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	4 LED
<b>Power</b>	11 W
<b>Lumen</b>	856 - 1159 lm
<b>Efficacy</b>	86 - 116 lm/W
<b>Driver option</b>	Remote driver (included)
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	M, W, EW

<b>Optic value</b>	30°, 56°, 91°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U0-G0
<b>ULR</b>	<1%
<b>ULOR</b>	<1%
<b>CIE flux code n°3</b>	100
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Glossy White, Glossy Black
<b>Weight</b>	0.6 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BRI-80001



**BRIGHTON 3** (BRI-80001)

**Accessory**

---



DALI Control System  
**Control-DALI**

---