

LEGEND 2 (LE-40722-S)**Product description**

With recessing box - Stainless frame

**Luminaire Structure**

- Available with interchangeable aluminium or stainless steel grade 316 frames
- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal high-efficiency PMMA diffuser
- Integral control gear

Optic

G

Product colour

00 - Stainless Steel

LEGEND 2 (LE-40722-S)


Technical information

Material	Stainless Steel
Light source	3 COB
Power	12 W
Lumen	95 - 103 lm
Efficacy	8 - 9 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	114°x63°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U1-G0, B0-U1-G1
ULR	10%
ULOR	10%
CIE flux code n°3	82
Dimming type	On/Off, 1-10V, DALI

Product colours	Stainless Steel
Weight	2.7 kg
Operating temperature	-20 °C to 45 °C
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal high-efficiency PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LE-40722-S

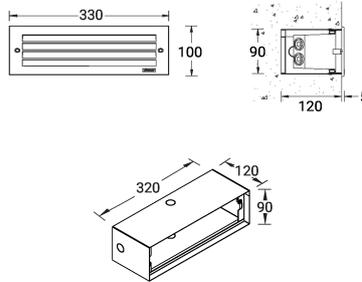

LEGEND 2 (LE-40722-S)

Accessory



DALI Control System
Control-DALI
