

MALMO 4 (MAL-90022)



Product description

Down - 490 mm



microPrim™


Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control


- Integral control gear
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Optic




Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request

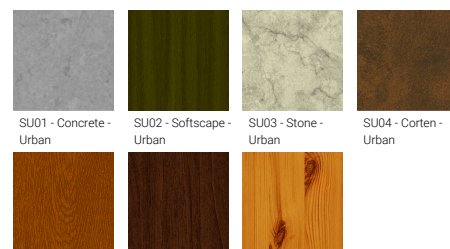

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban
SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

MALMO 4 (MAL-90022)


Technical information

Material	Aluminium
Light source	432 LED
Power	57 W
Lumen	5846 - 6724 lm
Efficacy	108 - 125 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	O, P
Optic value	107°, 94°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U0-G1, B3-U0-G1
ULR	0%
ULOR	0%

CIE flux code n°3	96, 97
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.8 kg
Operating temperature	-20 °C to 40 °C
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

MAL-90022




MALMO 4 (MAL-90022)


Accessory




Supply cable surface mounting box
A80981



Decorative pattern - Type A for MALMO 500 mm
A91021



Decorative pattern - Type B for MALMO 500 mm
A92421



Decorative pattern - Type C for MALMO 500 mm
A93821



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



Emergency module - 250V - BASIC
EM250V-BA



Emergency module - 250V - PRO-DALI
EM250V-DA



Emergency module - 250V - SELF-TEST
EM250V-ST



DALI Control System
Control-DALI