


**MUNSTER 1 (MUS-95011)**



**Product description**

Ø80x150 mm

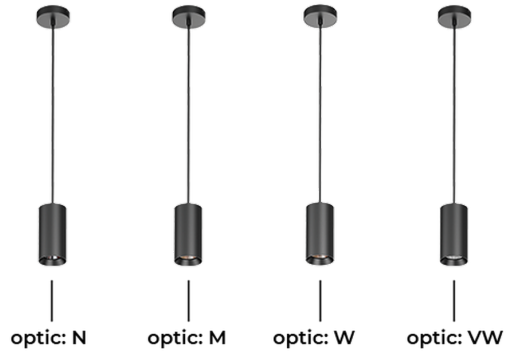


microPrim™

**Luminaire Structure**

- Die-cast aluminium housing
- With powder coating
- High-efficiency optical reflector
- Integral control gear
- 3 phase adapter for track mounting


**Optic**

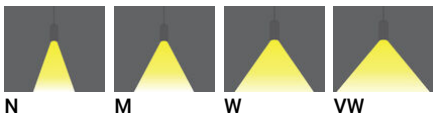

**Product colour**



**Special finishes upon request**

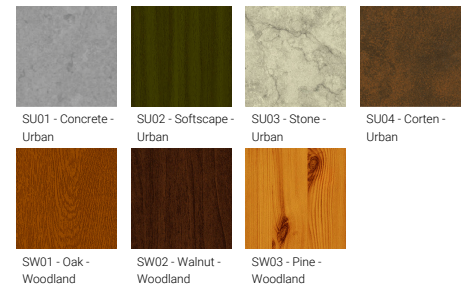

**MUNSTER 1 (MUS-95011)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	1 LED
<b>Power</b>	18 W
<b>Lumen</b>	1615 - 1804 lm
<b>Efficacy</b>	85 - 95 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	N, M, W, VW
<b>Optic value</b>	12°, 24°, 38°, 54°
<b>CCT / CRI</b>	3000K CRI90, 4000K CRI90
<b>ULR</b>	0%, <1%
<b>ULOR</b>	0%, <1%
<b>CIE flux code n°3</b>	99

<b>Dimming type</b>	On/Off
<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	1.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lens / Reflector / Optic</b>	High-efficiency optical reflector

MUS-95011

