

GINO 3 (GI-31651)



Product description


Clear diffuser - Down (Optic) & Up (Optic 2nd)




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

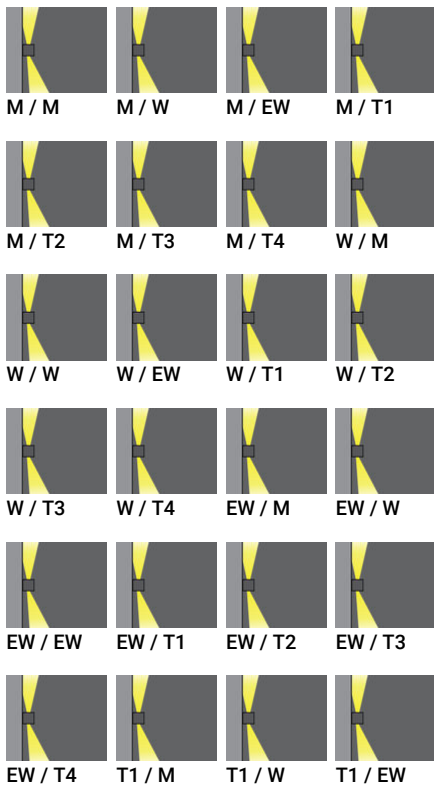

Product colour

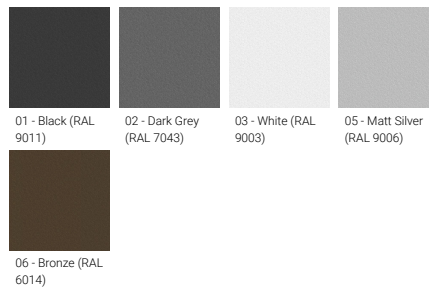

Special finishes upon request

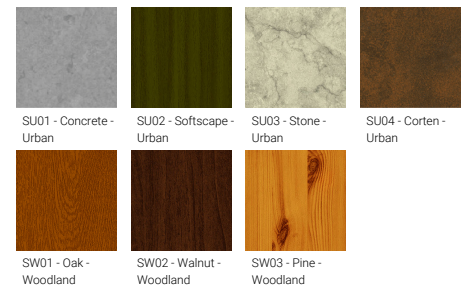

GINO 3 (GI-31651)



T1 / T1 T1 / T2 T1 / T3 T1 / T4



T2 / M T2 / W T2 / EW T2 / T1



T2 / T2 T2 / T3 T2 / T4 T3 / M



T3 / W T3 / EW T3 / T1 T3 / T2



T3 / T3 T3 / T4 T4 / M T4 / W



T4 / EW T4 / T1 T4 / T2 T4 / T3



T4 / T4

GINO 3 (GI-31651)



Technical information

Material	Aluminium
Light source	8 & 8 LED
Power	19 W
Lumen	1932 - 2418 lm
Efficacy	101 - 126 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T1, T2, T3, T4

Optic value	30°, 56°, 90°x114°, 148°x70°, 136°x52°, 135°x89°, 104°x67°
Optic (2nd)	M, W, EW, T1, T2, T3, T4
Optic (2nd) value	30°, 56°, 90°x114°, 148°x70°, 136°x52°, 135°x89°, 104°x67°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B0-U5-G0, B1-U4-G0, B1-U5-G0, B1-U5-G1
ULR	47%, 48%, 49%, 50%, 51%, 52%, 53%
ULOR	47%, 48%, 49%, 50%, 51%, 52%, 53%
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland

Weight	2.0 kg
Operating temperature	-20 °C to 50 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear glass diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GI-31651

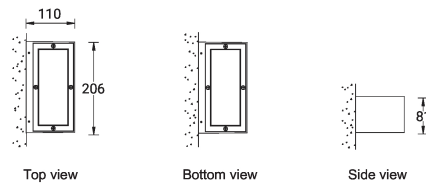

GINO 3 (GI-31651)**Accessory**



Surface mounting box for easy
cabling (GINO 3-COB)
SCE-GINO-3-COB



DALI Control System
Control-DALI
