


LIGHTTALK 12 (LA-60031) (Version 1)**Product description**

Without remote driver - With recessing box - Constant voltage (CV) 24 V - 455 mm - Class III - RGBW

**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic**Product colour**

00 - Stainless Steel

LIGHTALK 12 (LA-60031) (Version 1)


Technical information

Material	Stainless Steel
Light source	12 LED
Power	24 W
Lumen	510 - 1383 lm
Efficacy	21 - 58 lm/W
Driver option	Remote driver (not included)

Driver	Constant voltage (CV)
Input voltage	24 VDC
Optic	N, M, W, E
Optic value	16°, 32°, 55°, 20°x30°
CCT / CRI	RGB+Amber, RGBW30, RGBW40
Dimming type	DMX, DMX/RDM

Product colours	Stainless Steel
Weight	3.2 kg
Operating temperature	-20 °C to 40 °C
Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass

LA-60031

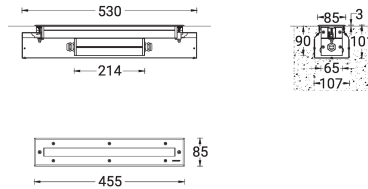

LIGHTALK 12 (LA-60031) (Version 1)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND