

ODESSA 23 (OD-21086)



Product description

Large - Supplied with specific 8 m cylindrical, tapered galvanised steel pole: SPT180176-OD



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass

- Integral control gear
- Maximum wind load resistance is 160 km/h
- RGBW available upon request


Optic



Product colour



Special finishes upon request

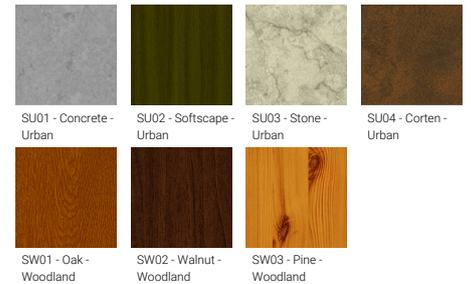


ODESSA 23 (OD-21086)

Technical information

Material	Aluminium
Light source	4 x 1 COB
Power	216 W
Lumen	23876 - 27932 lm
Efficacy	113 - 132 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW

Optic value	20°, 32°, 43°, 69°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B3-U0-G0, B4-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100, 99
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	124.0 kg

Operating temperature	-20 °C to 40 °C
EPA (m2)	0.941
Cable	One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 61,000
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

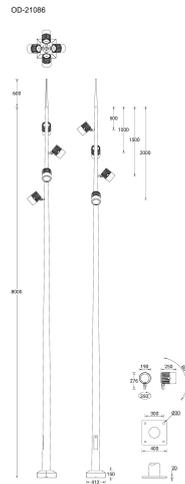


ODESSA 23 (OD-21086)**Accessory**



Anti glare louvre
A54531



Linear spread lens
A51814



Honeycomb louvre
A54121



Root mount kit
A21191



Anti glare visor
A54331

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)



8 m - Cylindrical, tapered
galvanised steel pole for
ODESSA
SPT180176-OD