

QBA 1 (QB-20941)



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear prismatic acrylic PMMA diffuser
- White coated aluminium reflector on the top of luminaire
- Integral control gear

Optic




G

Product colour

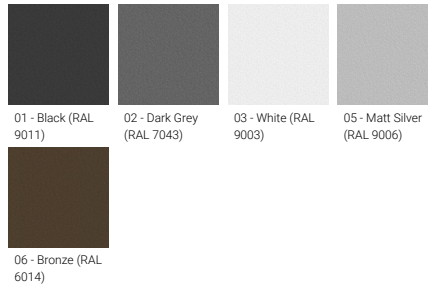

Special finishes upon request

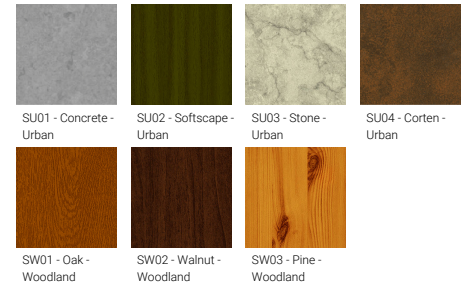

QBA 1 (QB-20941)


Technical information

Material	Aluminium
Light source	1 COB
Power	41 W
Lumen	2081 - 2107 lm
Efficacy	51 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	133°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	6.5 kg

Operating temperature	-20 °C to 40 °C
EPA (m2)	0.130
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear prismatic acrylic PMMA diffuser, White coated aluminium reflector on the top of luminaire
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 55,000
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

QB-20941

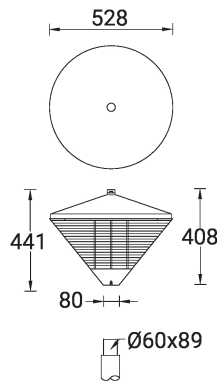

Accessory



DALI Control System
Control-DALI
