

LIGHTALK 14 (LA-30031) (Version 1)



Product description

Without remote driver - Constant voltage (CV) 24 V - 410 mm - Class III




microPrim™

Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal

Optic

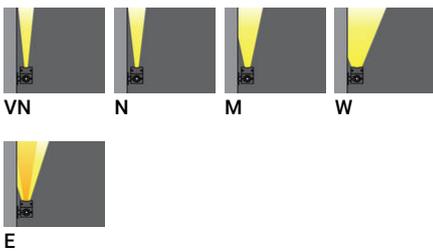

Product colour



Special finishes upon request




LIGHTALK 14 (LA-30031) (Version 1)

Technical information

Material	Aluminium	Optic value	13°, 15°, 27°, 43°, 21° x 35°	Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Light source	12 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Two cable entries for through wiring
Power	16 W	Bug	B2-U1-G0, B3-U1-G0	Lens / Reflector / Optic	Clear toughened glass
Lumen	1471 - 1882 lm	ULR	100%	MacAdam Ellipse	3 SDCM
Efficacy	92 - 118 lm/W	ULOR	100%	Lifetime L90B10 (hours)	> 120,000
Driver option	Remote driver (not included)	Dimming type	On/Off	Lifetime L80B10 (hours)	> 120,000
Driver	Constant voltage (CV)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 120,000
Input voltage	24 VDC			Weight	15.0 kg
Optic	VN, N, M, W, E	Operating temperature	-20 °C to 40 °C		

LA-30031

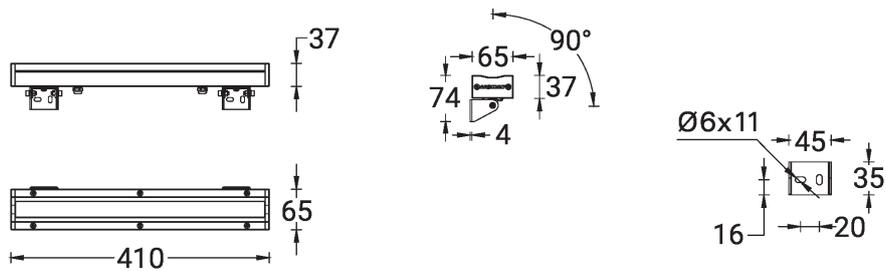


LIGHTALK 14 (LA-30031) (Version 1)

Accessory




Cable - Connector IP67 Female 2 Pin Power - 1000 mm
A65491-001

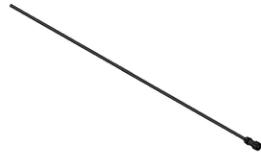

Cable - Connector IP67 Female 2 Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm
A65591-001

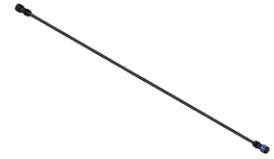

Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin Power
A68191



Connector IP67 Male 2 Pin Power
A68291



End cap - Connector IP67 Female 2 Pin and 3 Pin Power
A67991



End cap - Connector IP67 Male 2 Pin and 3 Pin Power
A68091



Driver (CV) - On/Off - 36 W - IP67 - 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W - IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W - IP67 - 24 V
A35091-ND



75 mm extend arm mounting
A30891



150 mm extend arm mounting
A30991

LIGHTALK 14 (LA-30031) (Version 1)



300 mm extend arm mounting
A31091



450 mm extend arm mounting
A31191
