

ODESSA 20 (OD-21053)



Product description

Large - 3 projectors - 1 side - RGBW




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 5x1.5 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 140 km/h


Optic



Product colour

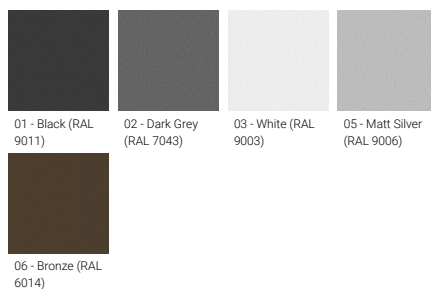

Special finishes upon request

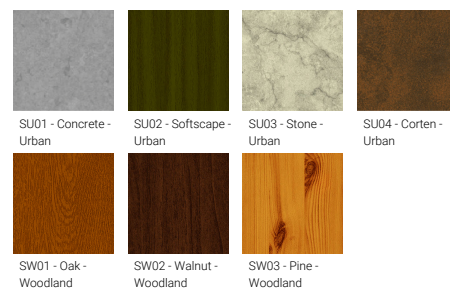


ODESSA 20 (OD-21053)

Technical information

Material	Aluminium	Optic	N, M, E	Weight	26.0 kg
Light source	3 x 7 LED	Optic value	20°, 34°, 24° x 49°	Operating temperature	-20 °C to 40 °C
Power	99 W	CCT / CRI	RGBW30, RGBW40	EPA (m2)	0.318
Lumen	3576 - 4266 lm	ULR	<1%	Cable	One cable gland supplied with 2 m of 5x1.5 sqmm outdoor cable
Efficacy	36 - 43 lm/W	ULOR	<1%	Through wiring	Single cable entry
Driver option	Integral control gear	CIE flux code n°3	100	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Driver	Constant current (CC)	Dimming type	DMX, DMX/RDM	Variants (DMX, DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		

OD-21053

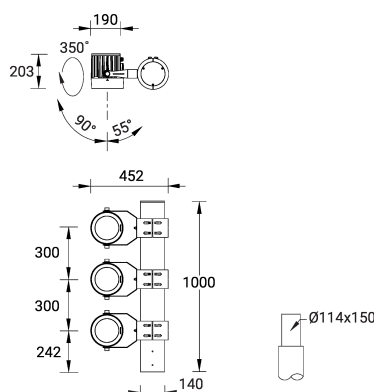

Accessory




Anti glare visor
A54431



Anti glare louvre
A54631



Linear spread lens
A51814



Honeycomb louvre
A54121



Remote box IP65
A80191



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.