

COLUMBUS 5 (CO-20196-1-1)



Product description

Shepherd's crook - Swept shade - Dome top




microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear

Optic



G


Product colour

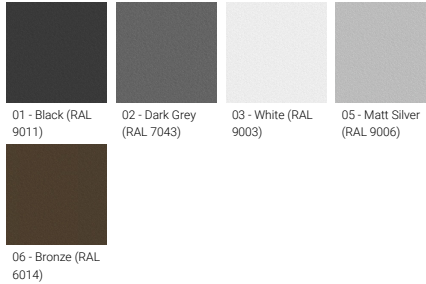

01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

Special finishes upon request

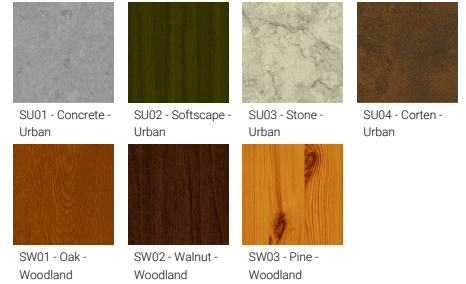

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban

SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

COLUMBUS 5 (CO-20196-1-1)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
Light source	1 COB	Optic value	144°			
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80			
Lumen	2019 - 2044 lm	Bug	B1-U3-G1			
Efficacy	49 - 50 lm/W	ULR	22%			
Driver option	Integral control gear	ULOR	22%			
Driver	Constant current (CC)	CIE flux code n°3	86			
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI			
					Weight	9.4 kg
					Operating temperature	-20 °C to 40 °C
				Lens / Reflector / Optic	Opal toughened glass diffuser	
				MacAdam Ellipse	3 SDCM	
				Lifetime L90B10 (hours)	> 55,000	
				Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	

CO-20196-1-1

