

GINO 1 (GI-31631)



Product description


Clear diffuser - Down (Optic) & Up (Optic 2nd)




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

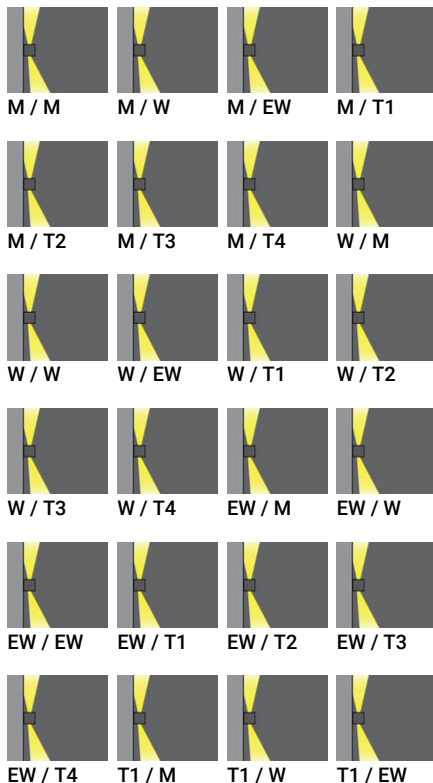

Product colour

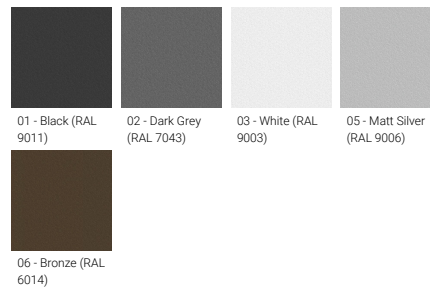

Special finishes upon request

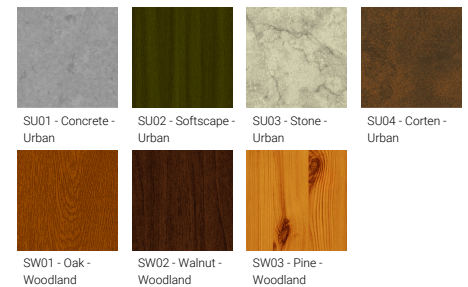

GINO 1 (GI-31631)



T1 / T1 T1 / T2 T1 / T3 T1 / T4



T2 / M T2 / W T2 / EW T2 / T1



T2 / T2 T2 / T3 T2 / T4 T3 / M



T3 / W T3 / EW T3 / T1 T3 / T2



T3 / T3 T3 / T4 T4 / M T4 / W



T4 / EW T4 / T1 T4 / T2 T4 / T3



T4 / T4

GINO 1 (GI-31631)


Technical information

| | |
|----------------------|--------------------------|
| Material | Aluminium |
| Light source | 4 & 4 LED |
| Power | 10 W |
| Lumen | 612 - 946 lm |
| Efficacy | 61 - 95 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | M, W, EW, T1, T2, T3, T4 |

| | |
|--------------------------|--|
| Optic value | 30°, 56°, 88°x107°, 143°x61°, 129°x44°, 126°x83°, 93°x64° |
| Optic (2nd) | M, W, EW, T1, T2, T3, T4 |
| Optic (2nd) value | 30°, 56°, 88°x107°, 143°x61°, 129°x44°, 126°x83°, 93°x64° |
| CCT / CRI | 2700K CRI80, 3000K CRI80, 4000K CRI80 |
| Bug | B0-U3-G0, B1-U3-G0 |
| ULR | 41%, 42%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 57%, 58% |
| ULOR | 41%, 42%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 57%, 58% |
| Dimming type | On/Off |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |

| | |
|---------------------------------|---|
| Weight | 0.9 kg |
| Operating temperature | -20 °C to 50 °C |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | Clear glass diffuser |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 90,000 |
| Lifetime L80B10 (hours) | > 90,000 |
| Lifetime L80B50 (hours) | > 90,000 |
| Variants (On/Off) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO) |

GI-31631

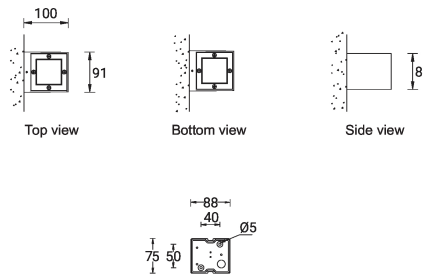

GINO 1 (GI-31631)**Accessory**



Surface mounting box for easy
cabling (GINO 1)
SCE-GINO-1
