

**LIGHTALK 7 (LA-30014)**



**Product description**

Integral control gear - 1205 mm - Class I - RGBW




microPrim™


**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal


**Optic**

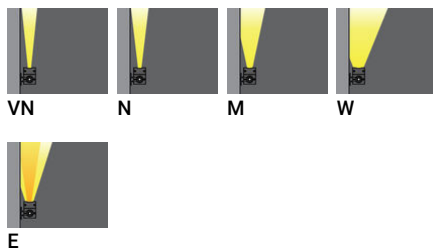

**Product colour**

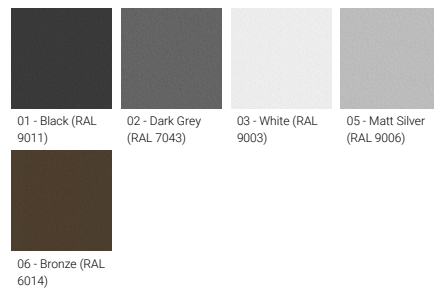

**Special finishes upon request**

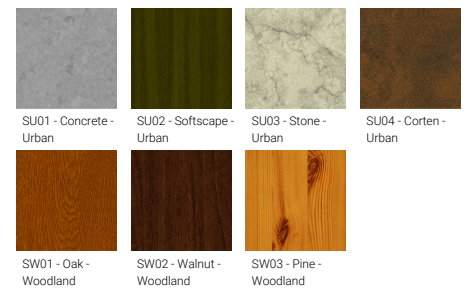


**LIGHTALK 7 (LA-30014)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic value</b>	10°, 13°, 25°, 43°, 18° x 35°	<b>Cable</b>	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
<b>Light source</b>	2 x 20 LED	<b>CCT / CRI</b>	RGBW30, RGBW40	<b>Through wiring</b>	Two cable entries for through wiring
<b>Power</b>	66 W	<b>Bug</b>	B0-U5-G0	<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Lumen</b>	3477 - 4043 lm	<b>ULR</b>	100%	<b>MacAdam Ellipse</b>	7 SDCM
<b>Efficacy</b>	53 - 61 lm/W	<b>ULOR</b>	100%	<b>Lifetime L90B10 (hours)</b>	> 50,000
<b>Driver option</b>	Integral control gear	<b>Dimming type</b>	DMX, DMX/RDM	<b>Lifetime L80B10 (hours)</b>	> 68,000
<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B50 (hours)</b>	> 100,000
<b>Input voltage</b>	220-240 V 50/60 Hz		<b>Weight</b>	5.3 kg	<b>Variants (DMX/RDM)</b>
<b>Optic</b>	VN, N, M, W, E	<b>Operating temperature</b>	-20 °C to 40 °C		

LA-30014

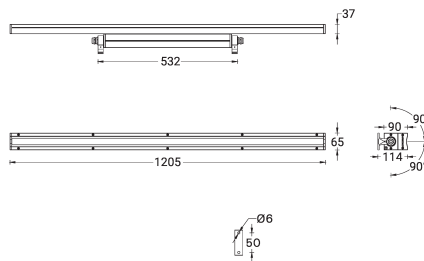

**LIGHTALK 7 (LA-30014)****Accessory**

75 mm extend arm mounting  
**A30891**



150 mm extend arm mounting  
**A30991**



300 mm extend arm mounting  
**A31091**



450 mm extend arm mounting  
**A31191**



Cloud Remote Management  
**A64991**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**