

MARVEL 1 (MAV-20002)



Product description

Ø70 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125070-MARVEL - Optic 90°x90°



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Optic




G

Product colour

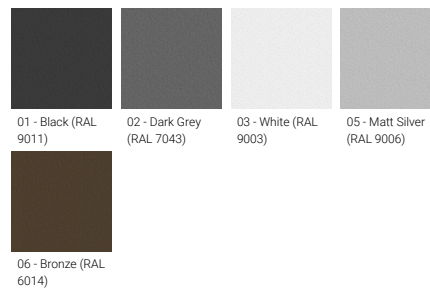

Special finishes upon request

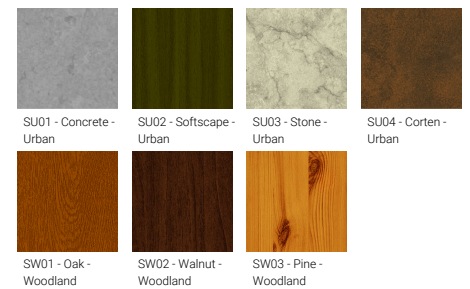


MARVEL 1 (MAV-20002)

Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 12 LED |
| Power | 20 W |
| Lumen | 2151 - 2264 lm |
| Efficacy | 108 - 113 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |

| | |
|--------------------------|--------------------------|
| Optic | G |
| Optic value | 137°X 89° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B1-U2-G1 |
| ULR | 1% |
| ULOR | 1% |
| CIE flux code n°3 | 98 |
| Dimming type | On/Off, DALI |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 8.0 kg |
| Operating temperature | -20 °C to 40 °C |
| EPA (m2) | 0.212 |
| Cable | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | High-efficiency PMMA lens, Clear toughened glass |
| Variants (DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

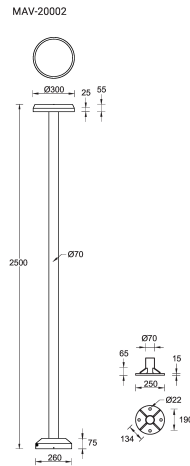

MARVEL 1 (MAV-20002)**Accessory**



Root mount kit
A24391

Pole (required)



2.5 m - Cylindrical, straight
aluminium pole for MARVEL
APD125070-MARVEL
