

MIC 6 (MI-50431)



Product description

Large



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear

Optic




N

M

W

Product colour

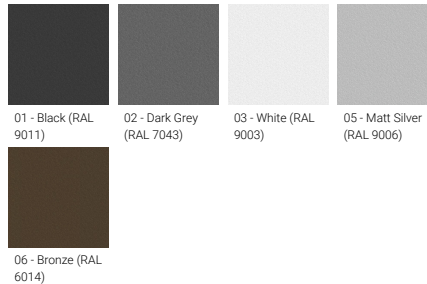

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

Special finishes upon request

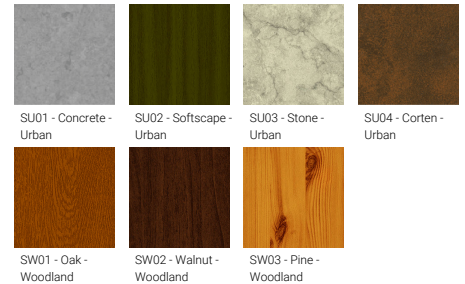

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland


SW03 - Pine - Woodland

MIC 6 (MI-50431)

Technical information

Material	Aluminium	Optic	N, M, W	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Light source	24 LED	Optic value	15°, 26°, 44°	MacAdam Ellipse	3 SDCM
Power	38 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 120,000
Lumen	3691 - 4272 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 120,000
Efficacy	97 - 112 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 120,000
Driver option	Integral control gear			Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)				
Input voltage	220-240 V 50/60 Hz	Weight	5.8 kg		
		Operating temperature	-20 °C to 40 °C		
		Through wiring	Single cable entry		

MI-50431

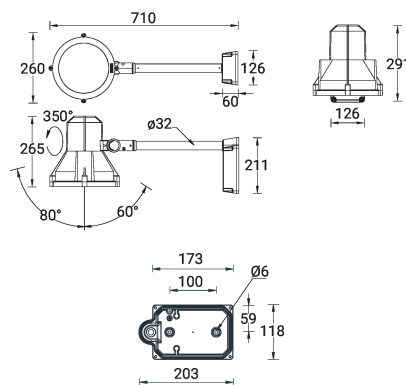

MIC 6 (MI-50431)

Accessory



Anti-glare visor
A50331



Anti-glare hood
A51731

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.