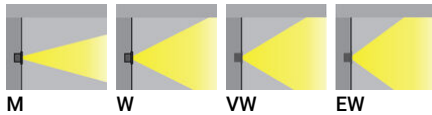


AQUA 1 (AQ-60001) (Version 1)**Product description**

Without remote box IP-rated - With remote driver /
recessing box - Constant current (CC) 700 mA

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in PVC is included
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

Optic**Product colour**

00 - Stainless Steel

AQUA 1 (AQ-60001) (Version 1)


Technical information

Material	Stainless Steel
Light source	1 COB
Power	14 W
Lumen	881 - 1057 lm
Efficacy	63 - 76 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	700 mA, 18 VDC
Optic	M, W, VW, EW

Optic value	33°, 42°, 53°, 67°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100, 99
Dimming type	On/Off, 1-10V
Product colours	Stainless Steel
Weight	1.1 kg

Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 60,500
Lifetime L80B10 (hours)	> 60,500
Lifetime L80B50 (hours)	> 60,500

AQ-60001

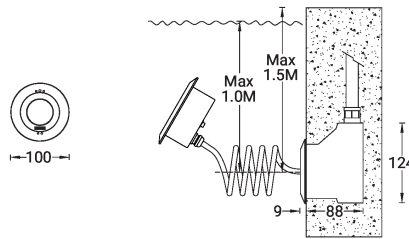

AQUA 1 (AQ-60001) (Version 1)

Accessory



DALI Control System
Control-DALI



Remote box IP65
A80291
