

ARIZONA 5 (AR-21052-SO-40) (Version 1)



Product description

Made to order for 40 W Vertical solar PV pole



Luminaire Structure

- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Integral control gear

Optic




T2 T3 T4

Product colour



01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)
06 - Bronze (RAL 6014)

Special finishes upon request

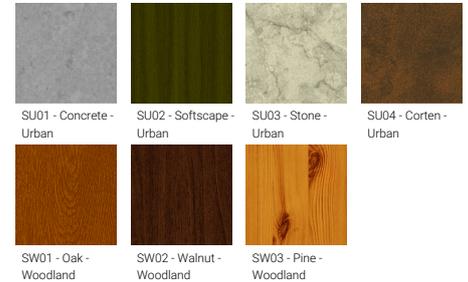

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban
SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

ARIZONA 5 (AR-21052-SO-40) (Version 1)


Technical information

Material	Aluminium
Light source	16 LED
Power	40 W
Lumen	3407 - 4351 lm
Efficacy	85 - 109 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	Solar 48 VDC
Optic	T2, T3, T4
Optic value	142°x 52°, 137°x 65°, 93°x 64°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B1-U2-G1
ULR	1%
ULOR	1%

CIE flux code n°3	97, 98
Dimming type	Dusk to Dawn, 2 Step dimming with motion sensor override, Solar Custom
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	8.1 kg
Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear acrylic PMMA diffuser

AR-21052

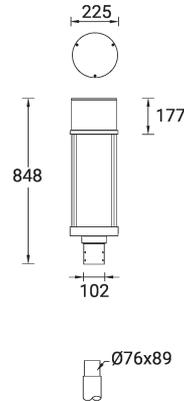

ARIZONA 5 (AR-21052-SO-40) (Version 1)**Accessory**



Remote solar charge controller
for Solar Integrated Bollards and
Vertical Solar PV poles
A92691



Vertical solar PV pole 1
SOL-20001



Vertical solar PV pole 2
SOL-20011



Vertical solar PV pole 6
SOL-20051



IoT Module
A95591



Auto dimming feature
auto-dim