


**ARIZONA 8 (AR-21162)**



**Product description**

Ø225 mm - Supplied with specific 3.675 m cylindrical, straight aluminium lighting poles with illuminated decorative graphic: APG130225-001-RGBW (45W - DMX/DMXRDM) - IP65 - IK07

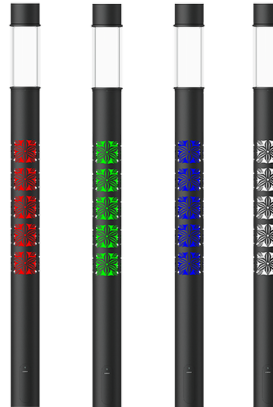


microPrim™

**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- High-efficiency PMMA lens
- Integral control gear
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.

**Optic**

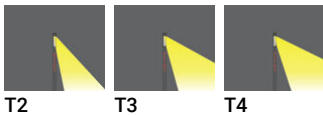

**Product colour**



**Special finishes upon request**




**ARIZONA 8 (AR-21162)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	16 LED, 3 x 16 LED
<b>Power</b>	85 W
<b>Lumen</b>	2911 - 3519 lm
<b>Efficacy</b>	34 - 41 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz

<b>Optic</b>	T2, T3, T4
<b>Optic value</b>	142°x 52°, 137°x 65°, 93°x 64°
<b>CCT / CRI</b>	RGBW30, RGBW40
<b>Bug</b>	B1-U2-G1
<b>ULR</b>	1%
<b>ULOR</b>	1%
<b>CIE flux code n°3</b>	97, 98
<b>Dimming type</b>	DMX, DMX/RDM

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	84.8 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>EPA (m2)</b>	0.827
<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	High-efficiency optical reflector, High-efficiency PMMA lens

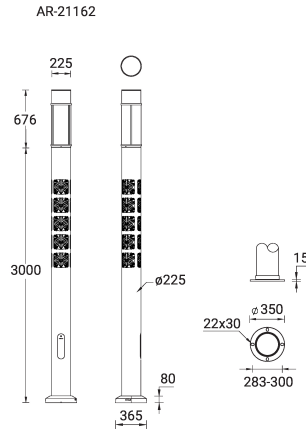

**ARIZONA 8 (AR-21162)****Accessory**

Circuit breaker box IP44  
**A21291**



Root mount kit  
**A20791**



Custom decorative graphic  
**A23291**




DMX Control System  
**Control-DMX**



DALI Control System  
**Control-DALI**



DMX/RDM Control System  
**Control-DMX-RDM**

**Pole (required)**

Graphic 1 - RGBW - 45W - 3.675  
m - Cylindrical, straight  
aluminium lighting poles with  
illuminated decorative graphic  
for ARIZONA - DMX/DMXRDM  
**APG130225-001-RGBW**