

EURASIA 1 (EU-20406-3)



Product description

Pointed top with medium shade



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Sandblast finishing aluminium reflector
- Clear UV-stabilised polycarbonate diffuser
- Integral control gear

Optic




G

Product colour

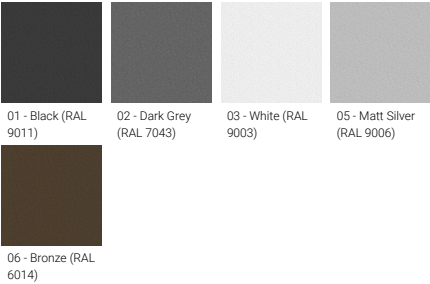

Special finishes upon request

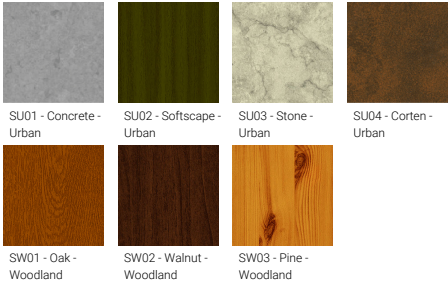


EURASIA 1 (EU-20406-3)

Technical information

Material	Aluminium	Optic	G		
Light source	1 COB	Optic value	170°x 76°		
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	980 - 993 lm	Bug	B1-U3-G1	Weight	7.8 kg
Efficacy	24 lm/W	ULR	15%	Operating temperature	-20 °C to 40 °C
Driver option	Integral control gear	ULOR	15%	Through wiring	Single cable entry
Driver	Constant current (CC)	CIE flux code n°3	78	Lens / Reflector / Optic	Sandblast finishing aluminium reflector, Clear UV-stabilised polycarbonate diffuser
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	MacAdam Ellipse	3 SDCM
				Lifetime L90B10 (hours)	> 55,000
				Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

EU20406-3



Accessory



DALI Control System
Control-DALI
