

**HARRIER 3 (HA-60295-A)**



**Product description**

Integral control gear - With recessing box - Round - Aluminium frame




microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in grade 316 stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Frosted toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for walk-over with a maximum load of 200 kg


**Optic**



**Product colour**

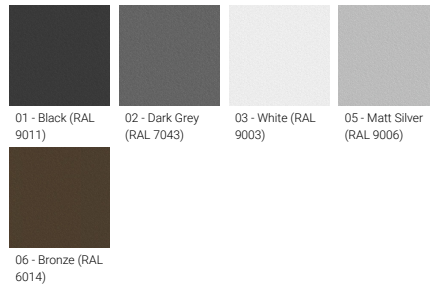

**Special finishes upon request**

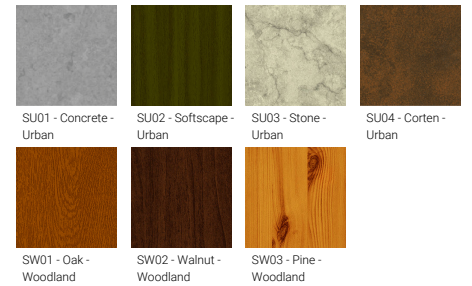


**HARRIER 3 (HA-60295-A)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic value</b>	95°, 84°	<b>Cable</b>	One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable	
<b>Light source</b>	12 LED	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Through wiring</b>	Single cable entry, through wiring upon request	
<b>Power</b>	6 W	<b>Bug</b>	B0-U3-G0	<b>Lens / Reflector / Optic</b>	Clear toughened glass, Frosted toughened glass, High-efficiency PMMA lens	
<b>Lumen</b>	308 - 410 lm	<b>ULR</b>	100%	<b>MacAdam Ellipse</b>	3 SDCM	
<b>Efficacy</b>	51 - 68 lm/W	<b>ULOR</b>	100%	<b>Lifetime L90B10 (hours)</b>	> 23,000	
<b>Driver option</b>	Integral control gear	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L80B10 (hours)</b>	> 45,000	
<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B50 (hours)</b>	> 50,000	
<b>Input voltage</b>	220-240 V 50/60 Hz			<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
<b>Optic</b>	C, F			<b>Weight</b>	2.1 kg	
		<b>Operating temperature</b>	-20 °C to 50 °C			

HA-60295-A

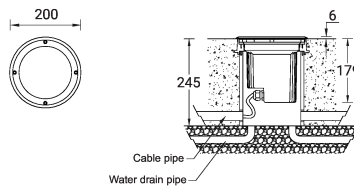

**HARRIER 3** (HA-60295-A)**Accessory**

Connector IP68 3 Pin Power  
**A62591**



Anti slip glass  
**A60212**



DALI Control System  
**Control-DALI**



Connector IP68 5 Pin Power +  
Signal  
**A613191**