

**ANESTI 1 (AN-20597)**



**Product description**

Supplied with a cylindrical, straight aluminium pole -  
Height options: 3 - 6 m



**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Integral control gear

- Driver is to be installed within the pole-head. Please contact the factory for pole compatibility.

**Optic**



T2      T3      T4

**Product colour**




01 - Black (RAL 9011)    02 - Dark Grey (RAL 7043)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

**Special finishes upon request**

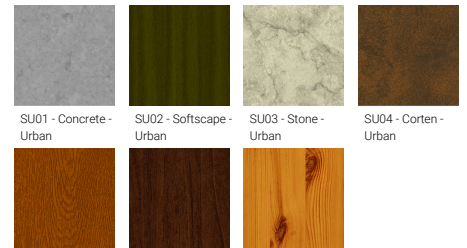

SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban

SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**ANESTI 1 (AN-20597)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	24 LED
<b>Power</b>	51 W
<b>Lumen</b>	6697 - 7102 lm
<b>Efficacy</b>	131 - 139 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	T2, T3, T4

<b>Optic value</b>	143°x58°, 129°x77°, 106°x73°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U3-G1, B2-U3-G2
<b>ULR</b>	3%
<b>ULOR</b>	3%
<b>CIE flux code n°3</b>	92, 94
<b>Dimming type</b>	On/Off
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	29.8 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>EPA (m2)</b>	0.160
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens, Clear acrylic PMMA diffuser
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Variants (On/Off)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AN-20597

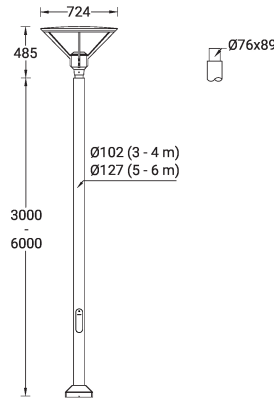

**ANESTI 1 (AN-20597)****Accessory**

Circuit breaker box IP44  
**A21291**



Root mount kit  
**A20491**



Root mount kit  
**A20691**



6 m - Cylindrical, straight  
aluminium pole DIA. 127 mm  
**APD160127-ASP**



5 m - Cylindrical, straight  
aluminium pole DIA. 127 mm  
**APD150127-ASP**



4 m - Cylindrical, straight  
aluminium pole DIA. 102 mm  
**APD140102-ASP**



3 m - Cylindrical, straight  
aluminium pole DIA. 102 mm  
**APD130102-ASP**