


BRIGHTON 1 (BRI-90001)**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- High-efficiency PMMA lens
- Integral control gear
- Stainless steel suspension kit in grade 304
- Suspension height adjustable up to 2 m

Optic

M W EW

Product colour

08 - Glossy White (RAL 9010) 09 - Glossy Black (HB451022M)

BRIGHTON 1 (BRI-90001)


Technical information

Material	Aluminium
Light source	4 LED
Power	11 W
Lumen	856 - 1159 lm
Efficacy	86 - 116 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW

Optic value	30°, 56°, 91°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V, DALI
Product colours	Glossy White, Glossy Black
Weight	0.8 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BRI-90001

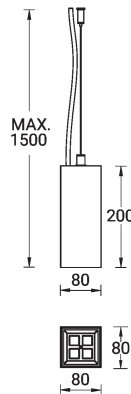

BRIGHTON 1 (BRI-90001)

Accessory



DALI Control System
Control-DALI
