

LADOR 24 (LD-50121)



Product description

Thread knuckle mounted - 63x63 mm



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Adjustable: Tilt 80° (Up) & 40° (Down), Rotation 350°

- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear


Optic

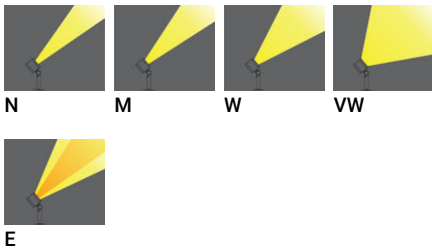

Product colour



Special finishes upon request

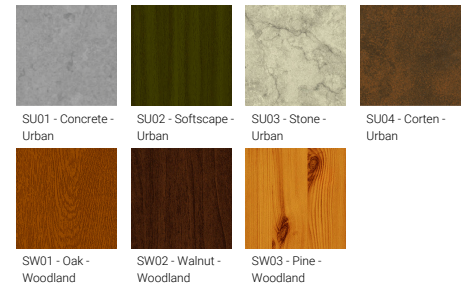

LADOR 24 (LD-50121)

Technical information

Material	Aluminium
Light source	1 LED
Power	3 W
Lumen	149 - 222 lm
Efficacy	50 - 74 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)


Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW, E
Optic value	10°, 19°, 33°, 71°, 41°x14°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U1-G0
ULR	0%, <1%
ULOR	0%, <1%

CIE flux code n°3	100
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	1.4 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass

LADOR 24 (LD-50121)**Accessory**



Anti-glare visor
A52831



Honeycomb louvre
A51821



Linear spread lens
A51114

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.