

**LADOR 30 (LD-50181)**



**Product description**

Bracket mounted - Integral control gear - 120x120 mm  
- Class I



microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Adjustable: Tilt 80° (Up) & 40° (Down), Rotation 350°

- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear


**Optic**

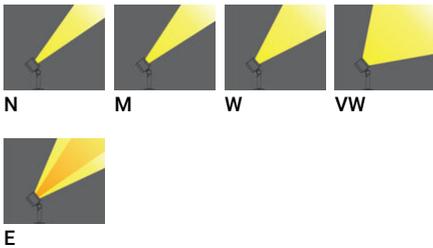

**Product colour**




**Special finishes upon request**

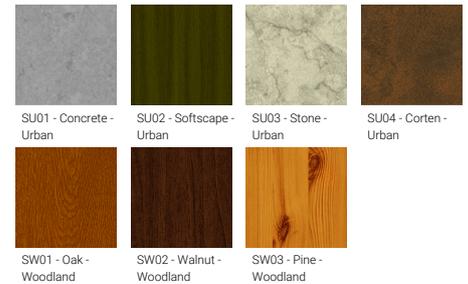

**LADOR 30 (LD-50181)**


**Technical information**

<b>Material</b>	Aluminium	<b>Optic value</b>	10°, 17°, 34°, 70°, 43°x11°	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	9 LED	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>EPA (m2)</b>	0.073
<b>Power</b>	21 W	<b>Bug</b>	B2-U0-G0, B3-U0-G0	<b>Through wiring</b>	Single cable entry
<b>Lumen</b>	1921 - 2364 lm	<b>ULR</b>	<1%	<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens, Clear toughened glass
<b>Efficacy</b>	91 - 113 lm/W	<b>ULOR</b>	<1%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Driver option</b>	Integral control gear	<b>CIE flux code n°3</b>	100	<b>Lifetime L90B10 (hours)</b>	> 120,000
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	On/Off, DALI	<b>Lifetime L80B10 (hours)</b>	> 120,000
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B50 (hours)</b>	> 120,000
<b>Optic</b>	N, M, W, VW, E		<b>Weight</b>	3.2 kg	<b>Variants (On/Off, DALI)</b>

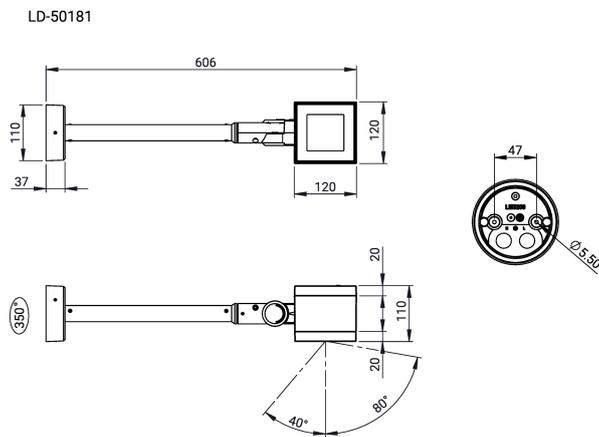

**LADOR 30 (LD-50181)****Accessory**

Anti-glare visor  
**A53031**

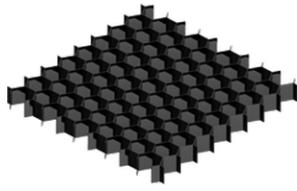

Honeycomb louvre  
**A52021**



Linear spread lens  
**A51314**



Ground spike  
**A51041**



DALI Control System  
**Control-DALI**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.