


## VICTORIA 4 (VIC-80032)



### Product description


Optic arrangement type 4




### Luminaire Structure

- Formed sheet steel body with powder coating
- White painted metal sheet
- One size: 600x600 mm
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Integral control gear
- Recessed and surface mounted options
- Accessories: Aluminium frame for surface installation & Aluminium frame for recessed installation of fitting into gypsum plasterboard

### Optic



### Product colour



03 - White (RAL 9003)

## VICTORIA 4 (VIC-80032)


### Technical information

|              |            |
|--------------|------------|
| Material     | Aluminium  |
| Light source | 3 x 48 LED |
| Power        | 38 W       |
| Lumen        | 5800 lm    |
| Efficacy     | 153 lm/W   |

|               |                       |
|---------------|-----------------------|
| Driver option | Integral control gear |
| Driver        | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz    |
| Optic         | W, VW                 |
| Optic value   | 60°, 90°              |


|                       |                          |
|-----------------------|--------------------------|
| CCT / CRI             | 3000K CRI90, 4000K CRI90 |
| Dimming type          | On/Off, DALI             |
| Product colours       | White                    |
| Weight                | 2.0 kg                   |
| Operating temperature | -20 °C to 40 °C          |

VIC-80032

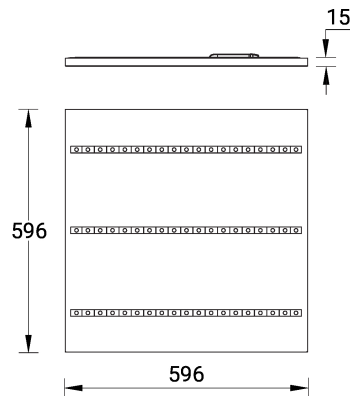

**VICTORIA 4 (VIC-80032)**

**Accessory**



Frame for recessed installation  
of fittings into gypsum  
plasterboard ceiling SQUARE  
(White)  
**A83081**



Frame for surface installation  
SQUARE (White)  
**A83281**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**