

## ARIZONA 5 (AR-21052-SO-40) (Version 1)



### Product description

Made to order for 40 W Vertical solar PV pole



### Luminaire Structure


- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Integral control gear

### Optic




T2 T3 T4

### Product colour

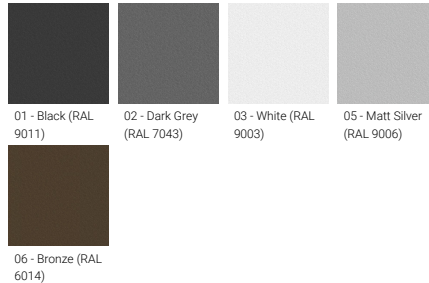

01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006) 06 - Bronze (RAL 6014)

### Special finishes upon request

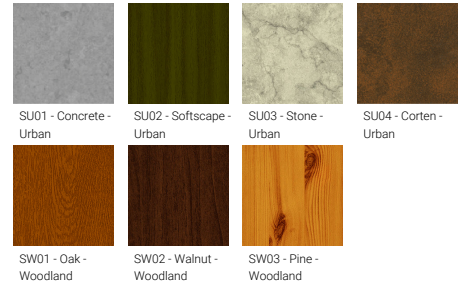

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

**ARIZONA 5 (AR-21052-SO-40) (Version 1)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	16 LED
<b>Power</b>	40 W
<b>Lumen</b>	3407 - 4351 lm
<b>Efficacy</b>	85 - 109 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	Solar 48 VDC
<b>Optic</b>	T2, T3, T4
<b>Optic value</b>	142°x 52°, 137°x 65°, 93°x 64°
<b>CCT / CRI</b>	2700K CRI80, 3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U2-G1
<b>ULR</b>	1%
<b>ULOR</b>	1%

<b>CIE flux code n°3</b>	97, 98
<b>Dimming type</b>	Dusk to Dawn, 2 Step dimming with motion sensor override, Solar Custom
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	8.1 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens, Clear acrylic PMMA diffuser

AR-21052

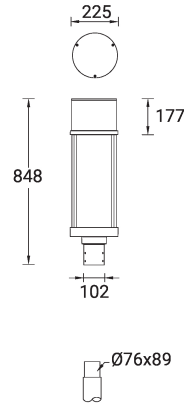

**ARIZONA 5 (AR-21052-SO-40) (Version 1)**

**Accessory**

---



Remote solar charge controller  
for Solar Integrated Bollards and  
Vertical Solar PV poles  
**A92691**



Vertical solar PV pole 1  
**SOL-20001**



Vertical solar PV pole 2  
**SOL-20011**



Vertical solar PV pole 6  
**SOL-20051**



IoT Module  
**A95591**



Auto dimming feature  
**auto-dim**