


ARIZONA 8 (AR-21161)



Product description

Ø225 mm - Supplied with specific 3.675 m cylindrical, straight aluminium lighting poles with illuminated decorative graphic: APG130225-001-RGBW (45W - DMX/DMXRDM) - IP65 - IK07

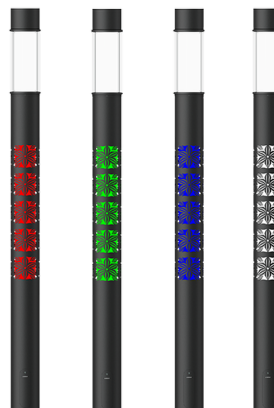

microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- High-efficiency PMMA lens
- Integral control gear
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.

Optic




G

Product colour

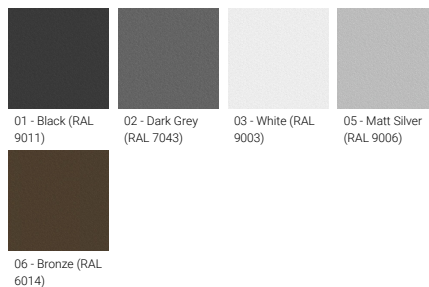


Special finishes upon request

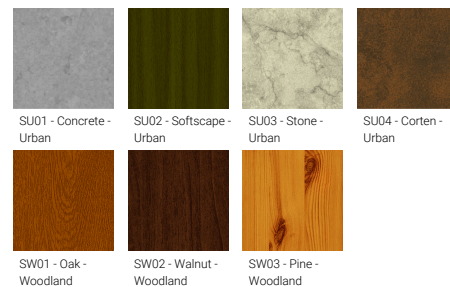

ARIZONA 8 (AR-21161)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB, 3 x 16 LED	Optic value	360°	Weight	84.8 kg
Power	87 W	CCT / CRI	RGBW30, RGBW40	Operating temperature	-20 °C to 40 °C
Lumen	3419 - 3657 lm	Bug	B2-U3-G0	EPA (m2)	0.827
Efficacy	39 - 42 lm/W	ULR	7%	Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Driver option	Integral control gear	ULOR	7%	Through wiring	Single cable entry
Driver	Constant current (CC)	CIE flux code n°3	99	Lens / Reflector / Optic	High-efficiency optical reflector, High-efficiency PMMA lens
Input voltage	220-240 V 50/60 Hz	Dimming type	DMX, DMX/RDM		

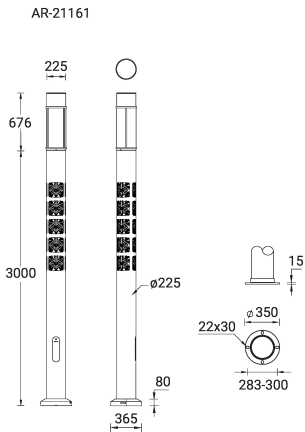

ARIZONA 8 (AR-21161)

Accessory



Circuit breaker box IP44
A21291



Root mount kit
A20791



Custom decorative graphic
A23291



DMX Control System
Control-DMX



DALI Control System
Control-DALI



DMX/RDM Control System
Control-DMX-RDM

Pole (required)



Graphic 1 - RGBW - 45W - 3.675
m - Cylindrical, straight
aluminium lighting poles with
illuminated decorative graphic
for ARIZONA - DMX/DMXRDM
APG130225-001-RGBW