

**FRAME 1 (FRA-10001)**



**Product description**

Down (Optic) & Up (Optic 2nd)



microPrim™



**Luminaire Structure**


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- IK08 for the concealed downlight lens and IK10 for the whole body and top casting
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass
- Integral control gear
- Surge protection 10kV
- Universal power socket & USB (IP66, IK06) is available as an accessory

**Optic**



G / G

**Product colour**




01 - Black (RAL 9011)    02 - Dark Grey (RAL 7043)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)




06 - Bronze (RAL 6014)

**Special finishes upon request**



SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**FRAME 1 (FRA-10001)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	4 x 36 & 2 x 36 LED
<b>Power</b>	36 W
<b>Lumen</b>	461 - 479 lm
<b>Efficacy</b>	13 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	G
<b>Optic value</b>	360°
<b>Optic (2nd)</b>	G
<b>Optic (2nd) value</b>	72°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Dimming type</b>	On/Off, 1-10V, DALI


<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	27.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Opal toughened glass
<b>Variants (On/Off)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

FRA-10001

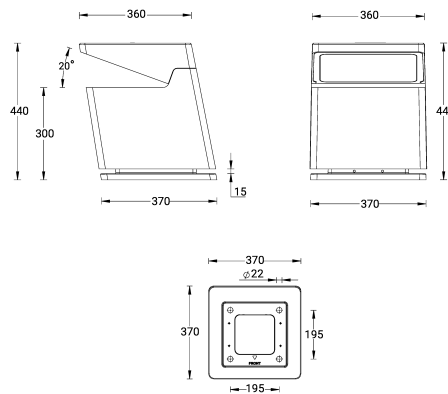

**FRAME 1** (FRA-10001)**Accessory**

---



---

Anchor bolt  
**A12591**

---



---

Universal power plug & USB  
**A92391**

---



---

North America power plug &  
USB Type C  
**A92391-US**

---



---

DALI Control System  
**Control-DALI**

---