


GAVLE 2 (GAV-80311)



Product description

Down - 110x90 mm - 1000 mm

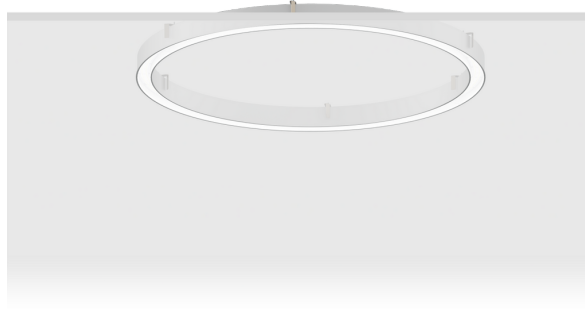

microPrim™

Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Opal PMMA diffuser (UGR <19) for glare control
- Integral control gear
- Stainless steel brackets and screws for mounting
- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options
- Down light distribution only

Optic



0

Product colour




01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban

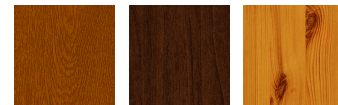

SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

GAVLE 2 (GAV-80311)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 672 LED |
| Power | 86 W |
| Lumen | 9497 - 9913 lm |
| Efficacy | 110 - 115 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |

| | |
|----------------------|--------------------------|
| Input voltage | 220-240 V 50/60 Hz |
| Optic | 0 |
| Optic value | 106° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B3-U0-G1 |
| ULR | 0%, <1% |
| ULOR | 0%, <1% |

| | |
|---------------------------------------|---|
| CIE flux code n°3 | 96 |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 9.6 kg |
| Operating temperature | -20 °C to 40 °C |
| Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO) |

Gavle 1000

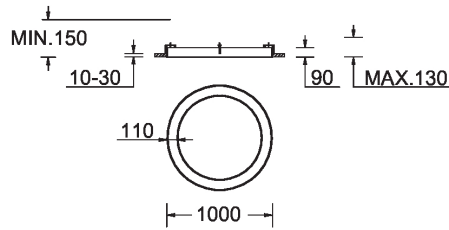

GAVLE 2 (GAV-80311)

Accessory



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI
