

PALETTA 4 (PA-31951-1MS)



Product description

345x190 mm - With integrated motion sensor




microPrim™



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour



Special finishes upon request

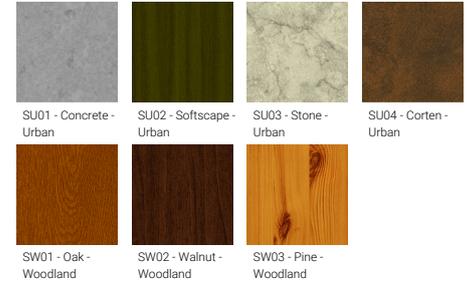

PALETTA 4 (PA-31951-1MS)



Technical information

Material	Aluminium
Light source	96 LED
Power	15 W
Lumen	1433 - 1508 lm
Efficacy	96 - 101 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	134°x123°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U2-G1
ULR	11%
ULOR	11%
CIE flux code n°3	88
Dimming type	On/Off, 1-10V

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.1 kg
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 15,000
Lifetime L80B10 (hours)	> 30,000
Lifetime L80B50 (hours)	> 34,000

PA-31951-1MS



- PALETTA**
- **Motion sensor - Microwave - 1-10 V**
 Adjustable sensor (10 seconds - 10 minutes)
 100° Sensitivity
 Sensor detection area 1.7 - 4.0m
 - **Motion sensor - Microwave - On/Off**
 Adjustable sensor (5 seconds - 30 minutes)
 100° Sensitivity
 Sensor detection area 1.0 - 8.0m

PALETTA 4 (PA-31951-1MS)**Accessory**



Surface mounting box for easy
cabling (PALETTA 4)
SCE-PALETTA-4



DALI Control System
Control-DALI



Remote controller for the motion
sensor - 1-10V (A34191)
A34391
