

HARRIER 3 (HA-60296-S)**Product description**

With recessing box / driver - Round - Stainless steel frame

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in grade 316 stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for walk-over with a maximum load of 200 kg

Optic

VN

Product colour

00 - Stainless Steel

HARRIER 3 (HA-60296-S)


Technical information

| | |
|----------------------|-----------------------|
| Material | Stainless Steel |
| Light source | 7 LED |
| Power | 22 W |
| Lumen | 2234 - 2351 lm |
| Efficacy | 102 - 107 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | VN |

| | |
|------------------------------|--------------------------|
| Optic value | 8° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B0-U5-G0 |
| ULR | 100% |
| ULOR | 100% |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Stainless Steel |
| Weight | 2.3 kg |
| Operating temperature | -20 °C to 50 °C |

| | |
|---------------------------------|---|
| Cable | One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry, through wiring upon request |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 109,000 |
| Lifetime L80B10 (hours) | > 109,000 |
| Lifetime L80B50 (hours) | > 109,000 |
| Variants (On/Off, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

HA-60296-S

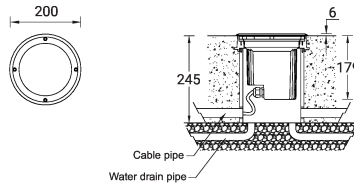

HARRIER 3 (HA-60296-S)**Accessory**

Connector IP68 3 Pin Power
A62591



Anti slip glass
A60212



DALI Control System
Control-DALI



Connector IP68 5 Pin Power +
Signal
A613191