

NORDSTROM 2 (NOD-50011)



Product description

Integral control gear - 82x82 mm - Class I



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry


- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear


Optic

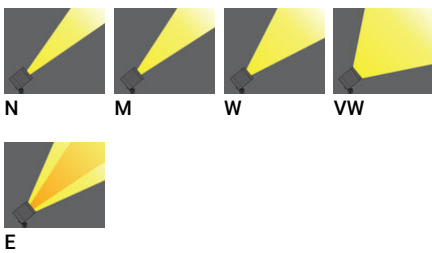

Product colour

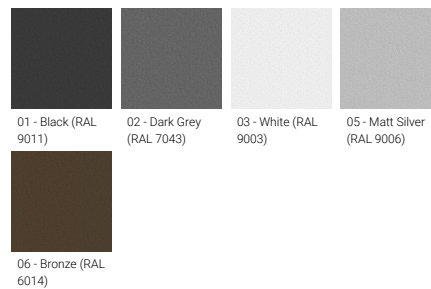

Special finishes upon request

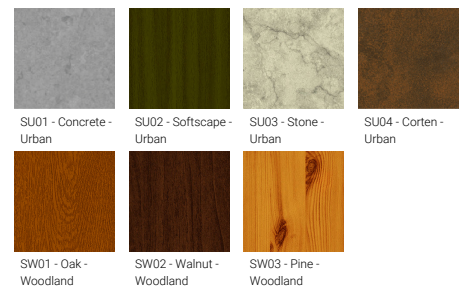


NORDSTROM 2 (NOD-50011)

Technical information

Material	Aluminium	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable	
Light source	4 LED	Bug	B1-U0-G0, B2-U0-G0	Through wiring	Single cable entry	
Power	10 W	ULR	<1%	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass	
Lumen	906 - 1112 lm	ULOR	<1%	MacAdam Ellipse	3 SDCM	
Efficacy	91 - 111 lm/W	CIE flux code n°3	100	Lifetime L90B10 (hours)	> 120,000	
Driver option	Integral control gear	Dimming type	On/Off	Lifetime L80B10 (hours)	> 120,000	
Driver	Constant current (CC)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 120,000	
Input voltage	220-240 V 50/60 Hz		Weight	1.3 kg	Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	N, M, W, VW, E		Operating temperature	-20 °C to 40 °C		
Optic value	10°, 16°, 34°, 68°, 43°x11°	EPA (m2)	0.014			


NOD-50011

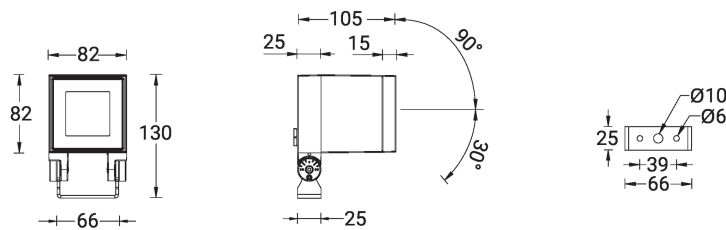

NORDSTROM 2 (NOD-50011)**Accessory**



Anti-glare visor
A52931



Honeycomb louvre
A51921



Linear spread lens
A51214



Ground spike
A50641

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.