

PRAGUE 3 (PRA-10021-1MS)



Product description

260x75 mm - 500 mm - With integrated motion sensor
- 1 side



microPrim™




DARKSKY APPROVED
Reduces light pollution
Certified by DarkSky.org




Luminaire Structure

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

Optic

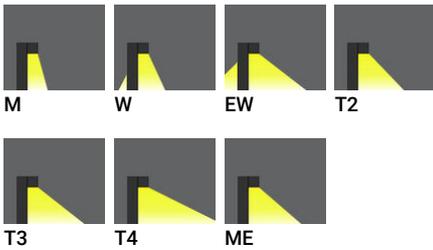

Product colour

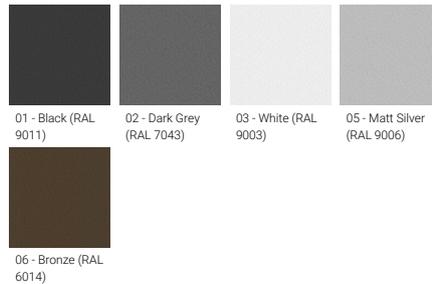

Special finishes upon request



PRAGUE 3 (PRA-10021-1MS)

Technical information


Material	Aluminium
Light source	12 LED
Power	20 W
Lumen	1938 - 2391 lm
Efficacy	102 - 126 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T2, T3, T4, ME

Optic value	30°x20°, 54°x33°, 104°x66°, 139°x56°, 126°x65°, 103°x68°, 137°x57°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B0-U2-G1, B0-U3-G1, B1-U3-G1
ULR	2%, 3%, 7%, 8%, 9%
ULOR	2%, 3%, 7%, 8%, 9%
CIE flux code n°3	95, 97
Dimming type	1-10V
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	7.0 kg


Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000

PRAGUE

Adjustable sensor (5 seconds - 30 minutes)
30° - 150° Sensitivity
Sensor detection area: 9 m

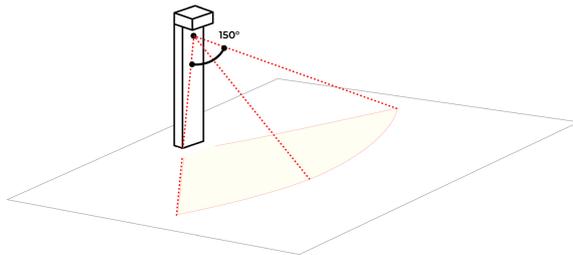

PRA-10021-1MS

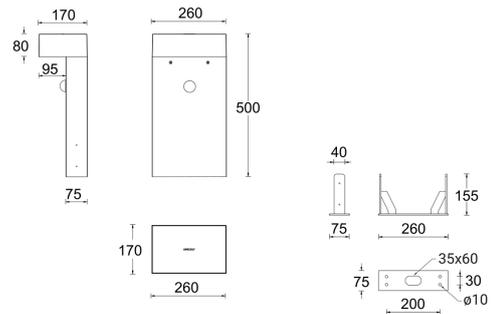

PRAGUE 3 (PRA-10021-1MS)**Accessory**



Remote controller for the motion
sensor - 1-10V
A14291



Anchor bolt
A12091
