

RADO 5 (RA-40582)



Product description

With recessing box



microPrim™



Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Optic




G

Product colour

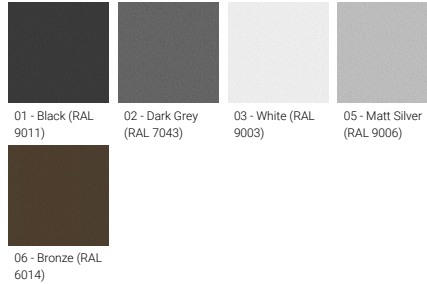

Special finishes upon request

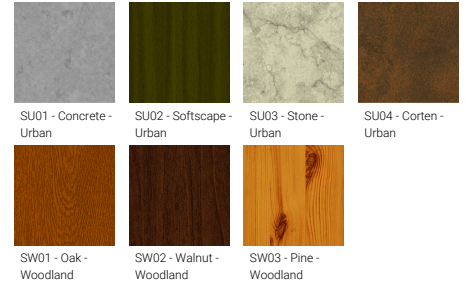

RADO 5 (RA-40582)


Technical information

Material	Aluminium
Light source	48 LED
Power	17 W
Lumen	536 - 620 lm
Efficacy	32 - 36 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G

Optic value	32°x88°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B0-U2-G0, B0-U2-G1
ULR	7%
ULOR	7%
CIE flux code n°3	82
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	1.4 kg

Operating temperature	-20 °C to 40 °C
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 23,000
Lifetime L80B10 (hours)	> 45,000
Lifetime L80B50 (hours)	> 49,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

RA-40582



RADO 5 (RA-40582)

Accessory



DALI Control System
Control-DALI
