

SANDY 4 (SA-31501) (Version 2)



Product description

Small




microPrim™

Luminaire Structure


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



G

Product colour

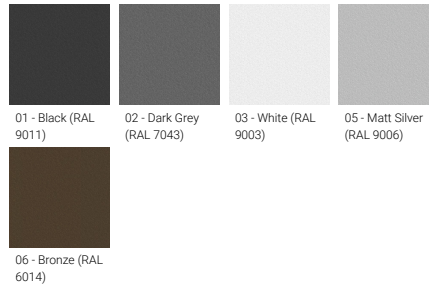

Special finishes upon request




SANDY 4 (SA-31501) (Version 2)

Technical information

Material	Aluminium	Optic value	107°x107°	Operating temperature	-20 °C to 40 °C
Light source	80 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Two cable entries for through wiring
Power	19 W	Bug	B0-U3-G2	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Lumen	873 - 919 lm	ULR	36	MacAdam Ellipse	3 SDCM
Efficacy	46 - 48 lm/W	ULOR	36	Lifetime L90B10 (hours)	> 37,000
Driver option	Integral control gear	CIE flux code n°3	73	Lifetime L80B10 (hours)	> 78,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B50 (hours)	> 86,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	G		Weight	2.3 kg	

SA-31501

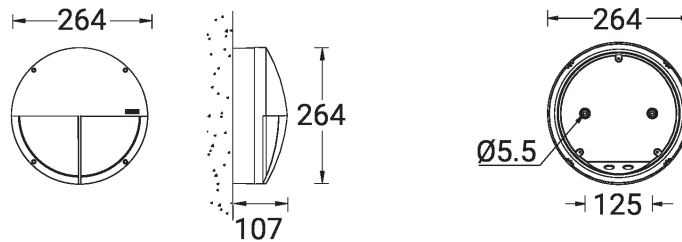

SANDY 4 (SA-31501) (Version 2)**Accessory**



Surface mounting box for easy
cabling (SANDY 4)
SCE-SANDY-4



DALI Control System
Control-DALI
