

GAVLE 6 (GAV-90313)



Product description

Down (Optic) & Up (Optic 2nd) - 100x100 mm - 1000 mm - RGBW



microPrim™

Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Opal PMMA diffuser (UGR <19) for glare control

- Remote driver (included)
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection


- Daylight and occupancy sensor options

Optic




0 / 0

Product colour

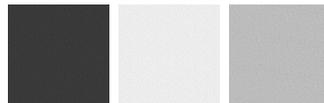

01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request

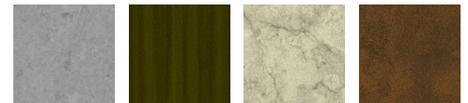

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

GAVLE 6 (GAV-90313)


Technical information

Material	Aluminium
Light source	2688 & 2688 LED
Power	186 W
Lumen	7127 lm
Efficacy	38 lm/W
Driver option	Remote driver (included)

Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	O
Optic value	Opal
Optic (2nd)	O
Optic (2nd) value	Opal

CCT / CRI	RGBW40
Dimming type	Bluetooth
Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	11.7 kg
Operating temperature	-20 °C to 40 °C
Variants (Bluetooth)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Gavle 1000

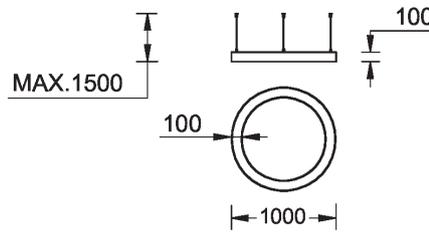

GAVLE 6 (GAV-90313)

Accessory



Supply cable surface mounting box
A80981



Xpress wireless switch
A90591




SLESA-U9, DMX Controller 256 CH
A60491



SLESA-U11, DMX Controller 1024 CH
A66891



TPC (Touch Panel Controller) & EXT (Extension) 1 Universe
A64491



PoE Connect
A64591



TPC Touch Screen & LPC Controller DMX 2 Universe
A64691



DMX/RDM Splitter - 1 channel input, 4 channels output
A64791



Cloud Remote Management
A64991



STICK-KE2, DMX Controller 1024 CH
A65091



Recessing box
A61051



TPS Touch Panel Station
A65191



LPCX (Lighting Playback Controller X)
A66991



EDN 10 (Ethernet Data Node 10 Universes)
A65391



DMX splitter & amplifier within an IP65 box
A63991



DINA-DR MICRO, DMX Lighting Controller & Power Adapter, 60 CH
A67291