

HARRIER 4 (HA-60306-A)



Product description

Integral control gear - With recessing box - Square - Aluminium frame



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in grade 316 stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for walk-over with a maximum load of 200 kg

Optic



VN

Product colour




01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)




06 - Bronze (RAL 6014)

Special finishes upon request




SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

HARRIER 4 (HA-60306-A)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 7 LED |
| Power | 22 W |
| Lumen | 2234 - 2351 lm |
| Efficacy | 102 - 107 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | VN |

| | |
|------------------------------|--|
| Optic value | 8° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B0-U5-G0 |
| ULR | 100% |
| ULOR | 100% |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 2.1 kg |
| Operating temperature | -20 °C to 50 °C |

| | |
|---------------------------------|---|
| Cable | One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry, through wiring upon request |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 109,000 |
| Lifetime L80B10 (hours) | > 109,000 |
| Lifetime L80B50 (hours) | > 109,000 |
| Variants (On/Off, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

HA-60306-A

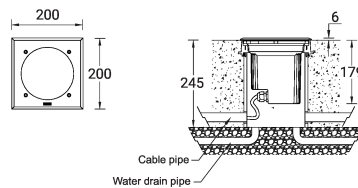

HARRIER 4 (HA-60306-A)**Accessory**

Connector IP68 3 Pin Power
A62591



Anti slip glass
A60212



DALI Control System
Control-DALI



Connector IP68 5 Pin Power +
Signal
A613191