

MALMO 4 (MAL-90152)



Product description

Down (Optic) & Up (Optic 2nd) - 1180 mm



microPrim™

Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Integral control gear
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

MALMO 4 (MAL-90152)


Technical information

Material	Aluminium
Light source	2736 & 864 LED
Power	302 W
Lumen	37594 - 42597 lm
Efficacy	101 - 114 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	O, P
Optic value	107°, 94°
Optic (2nd)	O
Optic (2nd) value	110°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B4-U5-G2, B4-U5-G3
ULR	25%, 28%
ULOR	25%, 28%

CIE flux code n°3	96, 97
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	20.6 kg
Operating temperature	-20 °C to 40 °C
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

MAL-90152

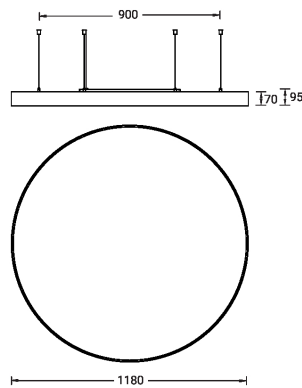

MALMO 4 (MAL-90152)**Accessory**


Supply cable surface mounting
box
A80981




Wireless bluetooth converter
A90291




Xpress wireless switch
A90591



Decorative pattern - Type A for
MALMO 1200 mm
A91321



Decorative pattern - Type B for
MALMO 1200 mm
A92721



Decorative pattern - Type C for
MALMO 1200 mm
A94121



DALI Control System
Control-DALI