

MIC 2 (MI-50415)



Product description

Small



microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear

Optic




VN


Product colour




01 - Black (RAL 9011)




02 - Dark Grey (RAL 7043)



03 - White (RAL 9003)




05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)


Special finishes upon request



SU01 - Concrete - Urban



SU02 - Softscape - Urban



SU03 - Stone - Urban



SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

MIC 2 (MI-50415)

Technical information

Material	Aluminium	Optic	VN	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Light source	3 LED	Optic value	8°	MacAdam Ellipse	3 SDCM
Power	21 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 109,000
Lumen	1527 - 1798 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 109,000
Efficacy	73 - 86 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 109,000
Driver option	Integral control gear			Variants (On/Off, 1-10V, DALI) Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Driver	Constant current (CC)				
Input voltage	220-240 V 50/60 Hz	Weight	2.9 kg		
		Operating temperature	-20 °C to 40 °C		
		Through wiring	Single cable entry		

MI-50415

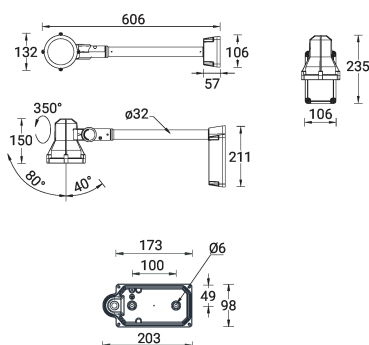

MIC 2 (MI-50415)**Accessory**



Anti-glare visor
A50131



Anti-glare hood
A51531

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.