

MATRIX 11 (MT-31410)



Product description

Optic 3 sides L (3L-180) - Without lamp



microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


- MATRIX luminaires with uplight and colder than 3000K CCT do not meet the IDA certification requirements

Optic




L

Product colour

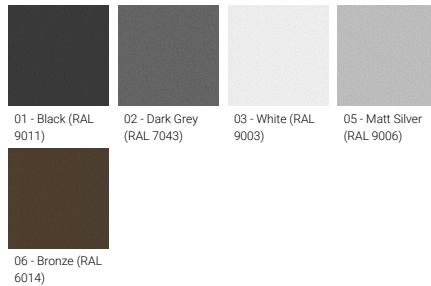

Special finishes upon request

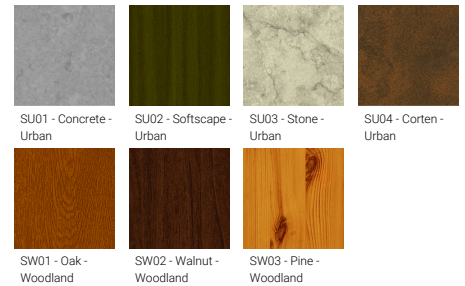


MATRIX 11 (MT-31410)

Technical information

Material	Aluminium
Light source	HIT-TC-CE
Power	35 W
Lumen	360 lm
Efficacy	10 lm/W
Driver option	Integral control gear

Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	L
Optic value	5°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.1 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass



MATRIX 11 (MT-31410)**Accessory**



Surface mounting box for easy
cabling (MATRIX 11)
SCE-MATRIX-11
