

QUARTER 2 (QU-20022)



Product description


Medium - 1 side




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


Optic

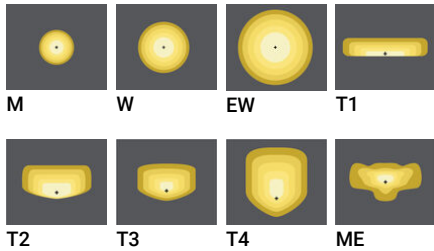

Product colour

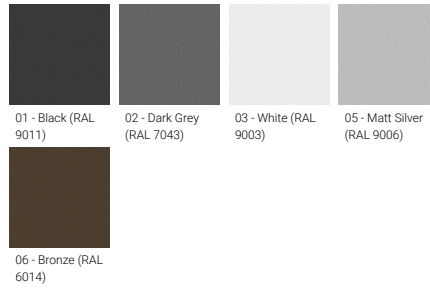

Special finishes upon request

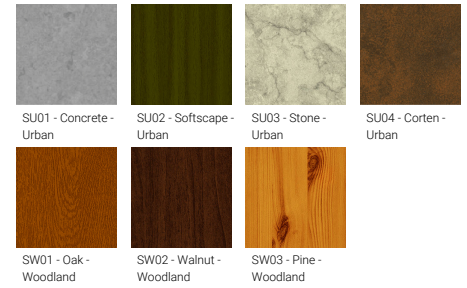

QUARTER 2 (QU-20022)

Technical information

Material	Aluminium
Light source	2 x 24 LED
Power	75 W
Lumen	8814 - 10079 lm
Efficacy	118 - 134 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	M, W, EW, T1, T2, T3, T4, ME 30°, 56°, 112°, 145°x75°
Optic value	136°x58°, 123°x93°, 105°x69°, 140°x63°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U0-G1, B2-U0-G2, B3-U0-G0, B3-U0-G1, B3-U0-G3, B4-U0-G0, B4-U0-G1
ULR	0%, <1%
ULOR	0%, <1%
CIE flux code n°3	96, 97, 98, 99
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	13.2 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

QU-20022

