

TRIANGLE 9 (TR-31711)




microVos microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic

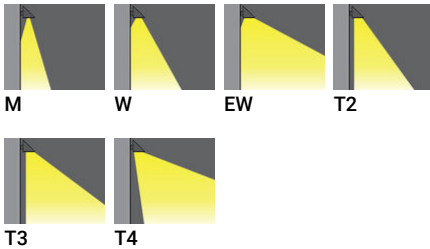

Product colour

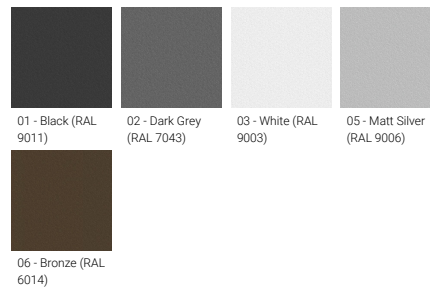

Special finishes upon request

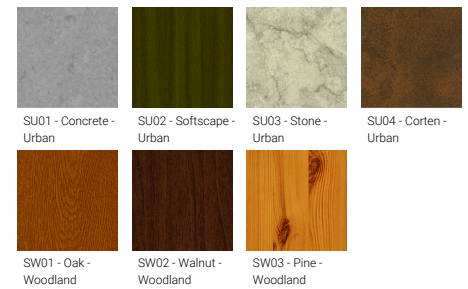


TRIANGLE 9 (TR-31711)

Technical information

Material	Aluminium	Optic	M, W, EW, T2, T3, T4	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Light source	24 LED	Optic value	30°, 52°, 108°, 135°x47°, 140°x71°, 100°x81°	MacAdam Ellipse	3 SDCM
Power	38 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 90,000
Lumen	4260 - 4917 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 90,000
Efficacy	112 - 129 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 90,000
Driver option	Integral control gear			Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Driver	Constant current (CC)				
Input voltage	220-240 V 50/60 Hz	Weight	20.1 kg	Variants (1-10V, DALI)	
		Operating temperature	-20 °C to 40 °C		
		Through wiring	Single cable entry		

TR-31711

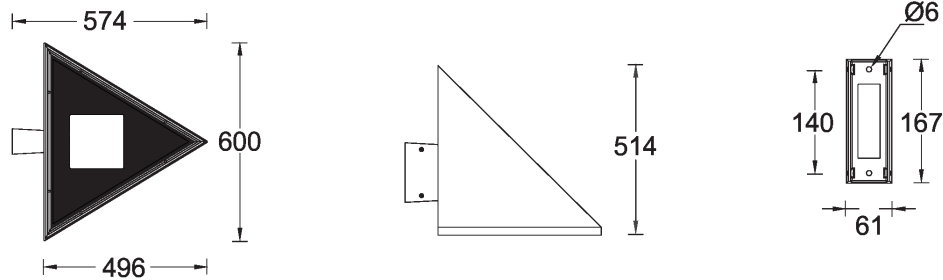

TRIANGLE 9 (TR-31711)

Accessory



DALI Control System
Control-DALI