

ATLANTIC 3 (AA-20046-2-1)**Product description**


Small - Straight shade - Dome top - IP55 - IK04



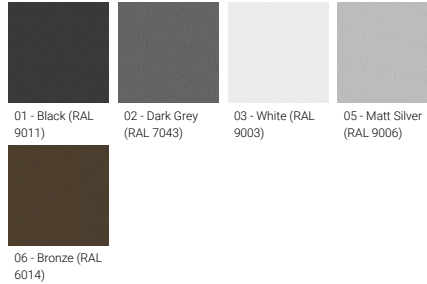
microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear

Optic

G

Product colour**Special finishes upon request**

ATLANTIC 3 (AA-20046-2-1)


Technical information

Material	Aluminium
Light source	1 COB
Power	29 W
Lumen	1082 - 1105 lm
Efficacy	37 - 38 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G

Optic value	143°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U3-G1
ULR	16%
ULOR	16%
CIE flux code n°3	85
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	6.3 kg

Operating temperature	-20 °C to 50 °C
EPA (m2)	0.110
Through wiring	Single cable entry
Lens / Reflector / Optic	Opal toughened glass diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 61,000
Variants (1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AA-20046-2-1



ATLANTIC 3 (AA-20046-2-1)**Accessory**



DALI Control System
Control-DALI
